


Technical Product Catalog

Accessories/ Aksesuarlar

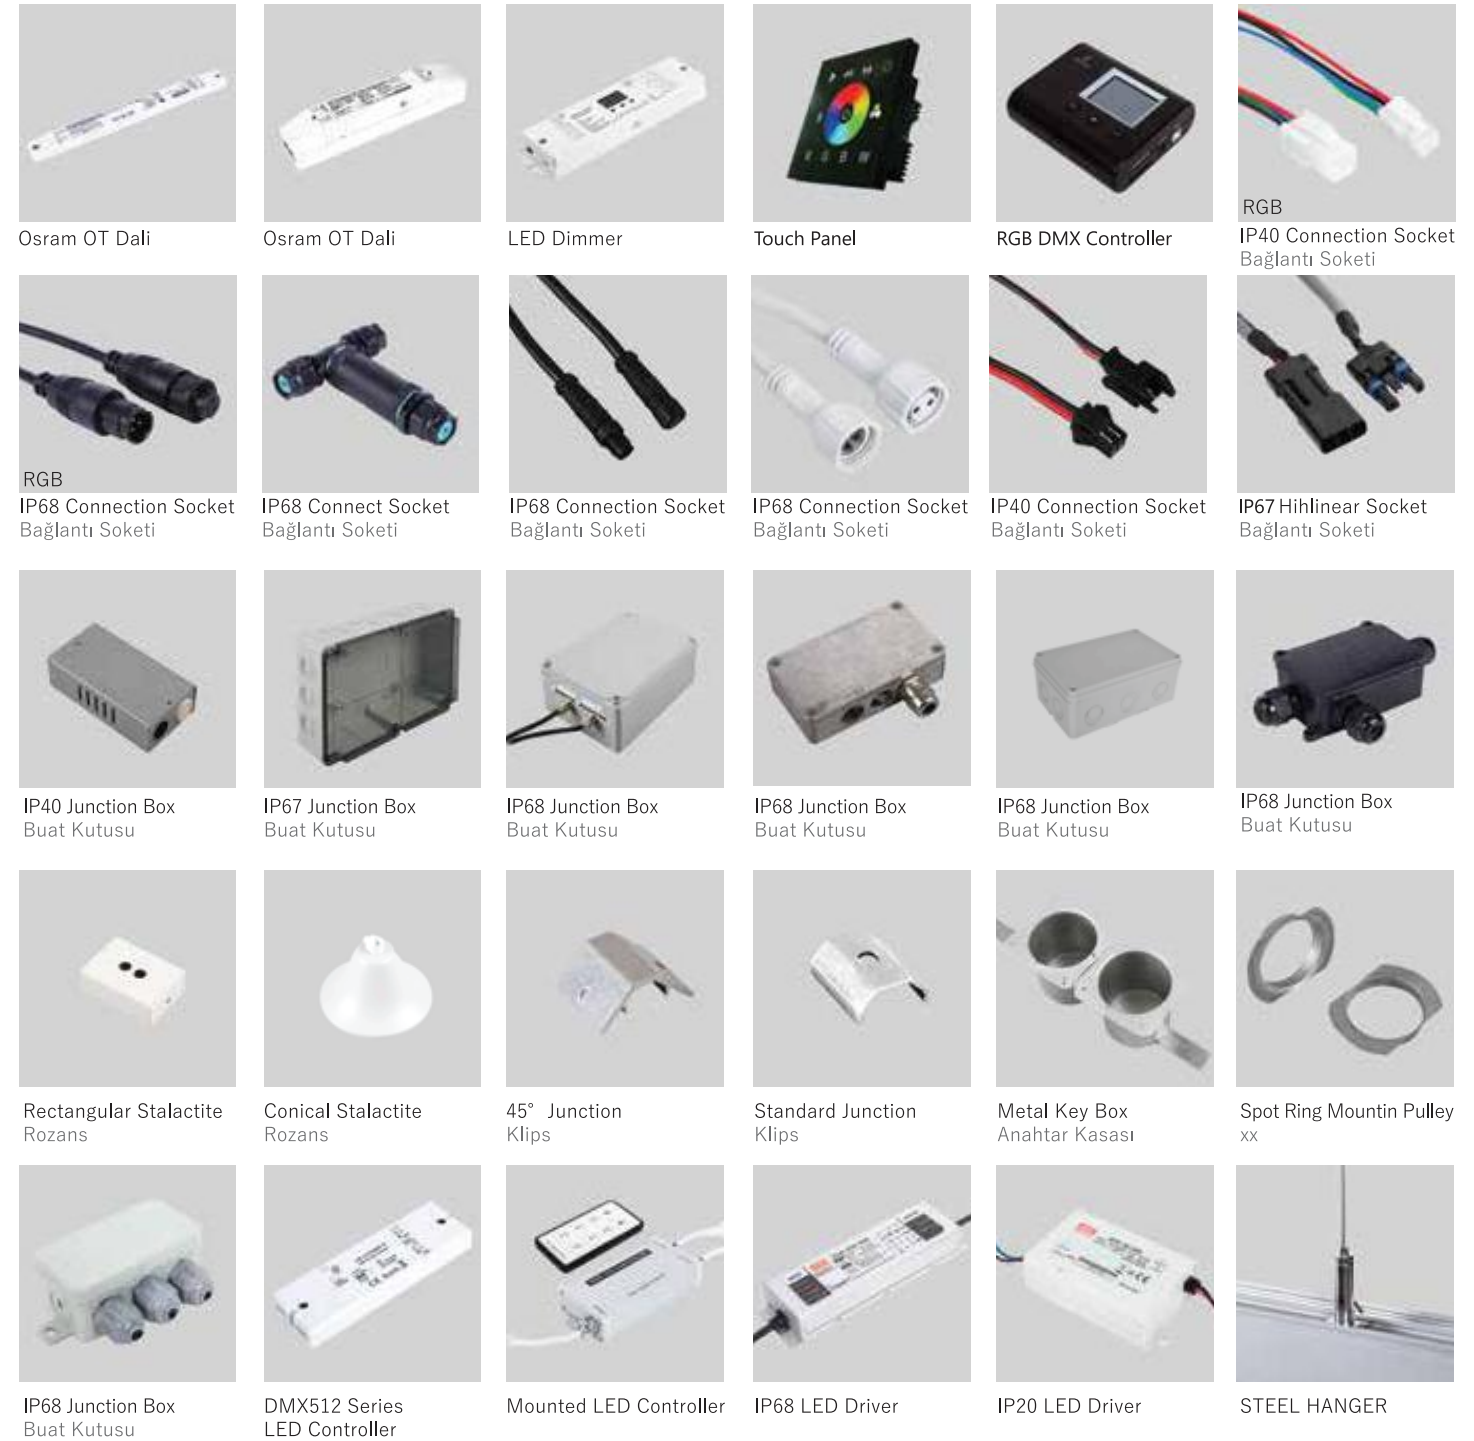

INDEX

ALÜMİNYUM LED PROFİL SURFACE MOUNTED



ESNEK ŞERİT LED CLEAR FLEX LED



DIŞ CEPHE LED PROFİL WALLWASHER



ANKASTRE LED CEILING RECESSED



ZEMİN LED PROFİL INGROUND



ALÜMİNYUM PROFİL SARKIT PENDANT




HIGHLINEAR


ALÜMİNYUM LED PROFİL



Code	Kelvin	Lenght	W	W/m	Lumen
111.001	2700K	600mm	3W	5W/m	116lm
111.002	2700K	1200mm	6W	5W/m	247lm
111.003	2700K	1800mm	9W	5W/m	343lm
112.001	2700K	600mm	7,2W	12W/m	297lm
112.002	2700K	1200mm	14,4W	12W/m	652lm
112.003	2700K	1800mm	21,6W	12W/m	893lm
121.001	4000K	600mm	3W	5W/m	128lm
121.002	4000K	1200mm	6W	5W/m	283lm
121.003	4000K	1800mm	9W	5W/m	399lm
122.001	4000K	600mm	7,2W	12W/m	334lm
122.002	4000K	1200mm	14,4W	12W/m	692lm
122.003	4000K	1800mm	21,6W	12W/m	985lm
111.013	RGB	600mm	7,2W	12W/m	334lm
111.013	RGB	1200mm	14,4W	12W/m	692lm
111.013	RGB	1800mm	21,4W	12W/m	985lm

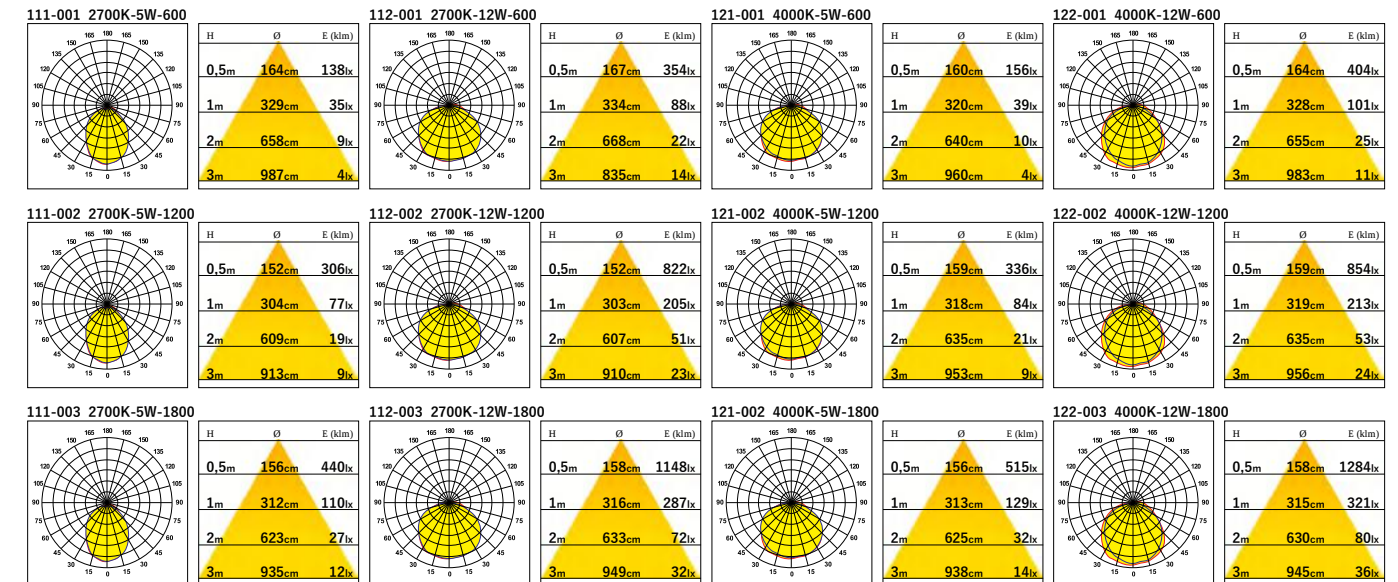

RK-3000

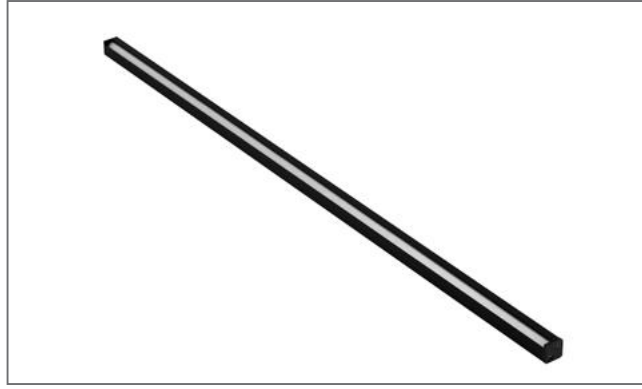

Code	LED	Output	W	Min.Cutting
5010.158.10	158 LED	24Vdc	10W	45mm
5010.12.12	12 LED	12Vdc	12W	31mm

SURFACE MOUNTED 01


ALÜMİNYUM LED PROFİL




Plexi cover,
Aluminum
anodized body,
IP40,
SMD LED,
140° light output.

Pleksi kapak,
Alüminyum
eloksallı gövde,
IP40,
SMD LED,
140° ışık çıkışı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	230cm	20lx
2m	460cm	5lx
3m	690cm	2lx
4m	920cm	1lx



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi

RK-1000



Code	LED	W	Min.Cutting
5011.60.6	60 LED	6W	100mm
5011.72.8	72 LED	8W	83mm
5011.120.12	120 LED	12W	83mm

SURFACE MOUNTED 02


ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
150° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
150° ışık çıkışı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	300cm	94lx
2m	590cm	24lx
3m	890cm	10lx
4m	1180cm	6lx



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi

RDM 1000



SURFACE MOUNTED 03

ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
180° ışık çıkışı.

Code	LED	W	Min.Cutting
5012.60.6	60 LED	6W	100mm
5012.72.8	72 LED	8W	83mm
5012.120.12	120 LED	12W	83mm

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

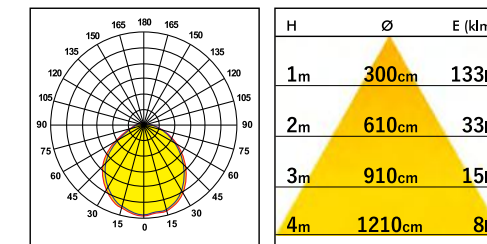

RD-M 2000



Code	LED	W	Min.Cutting
5013.60.5	60 LED	5W	100mm
5013.60.14	60 LED	14W	100mm

SURFACE MOUNTED 04


ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
Flexible LED,
140° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
Esnek şerit LED,
140° ışık çıkışı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	200cm	14lx
2m	400cm	36lx
3m	610cm	16lx
4m	810cm	9lx



Osram OT Dali




IP40 Connection Socket
Bağlantı Soketi

RD-M 1000



Code	LED	W	Min.Cutting
5014.60.5	60 LED	5W	100mm
5014.72.8	72 LED	8W	83mm
5014.120.12	120 LED	12W	83mm

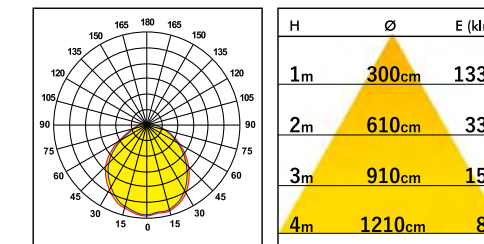

SURFACE MOUNTED 05


ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
180° ışık çıkışı.


Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi

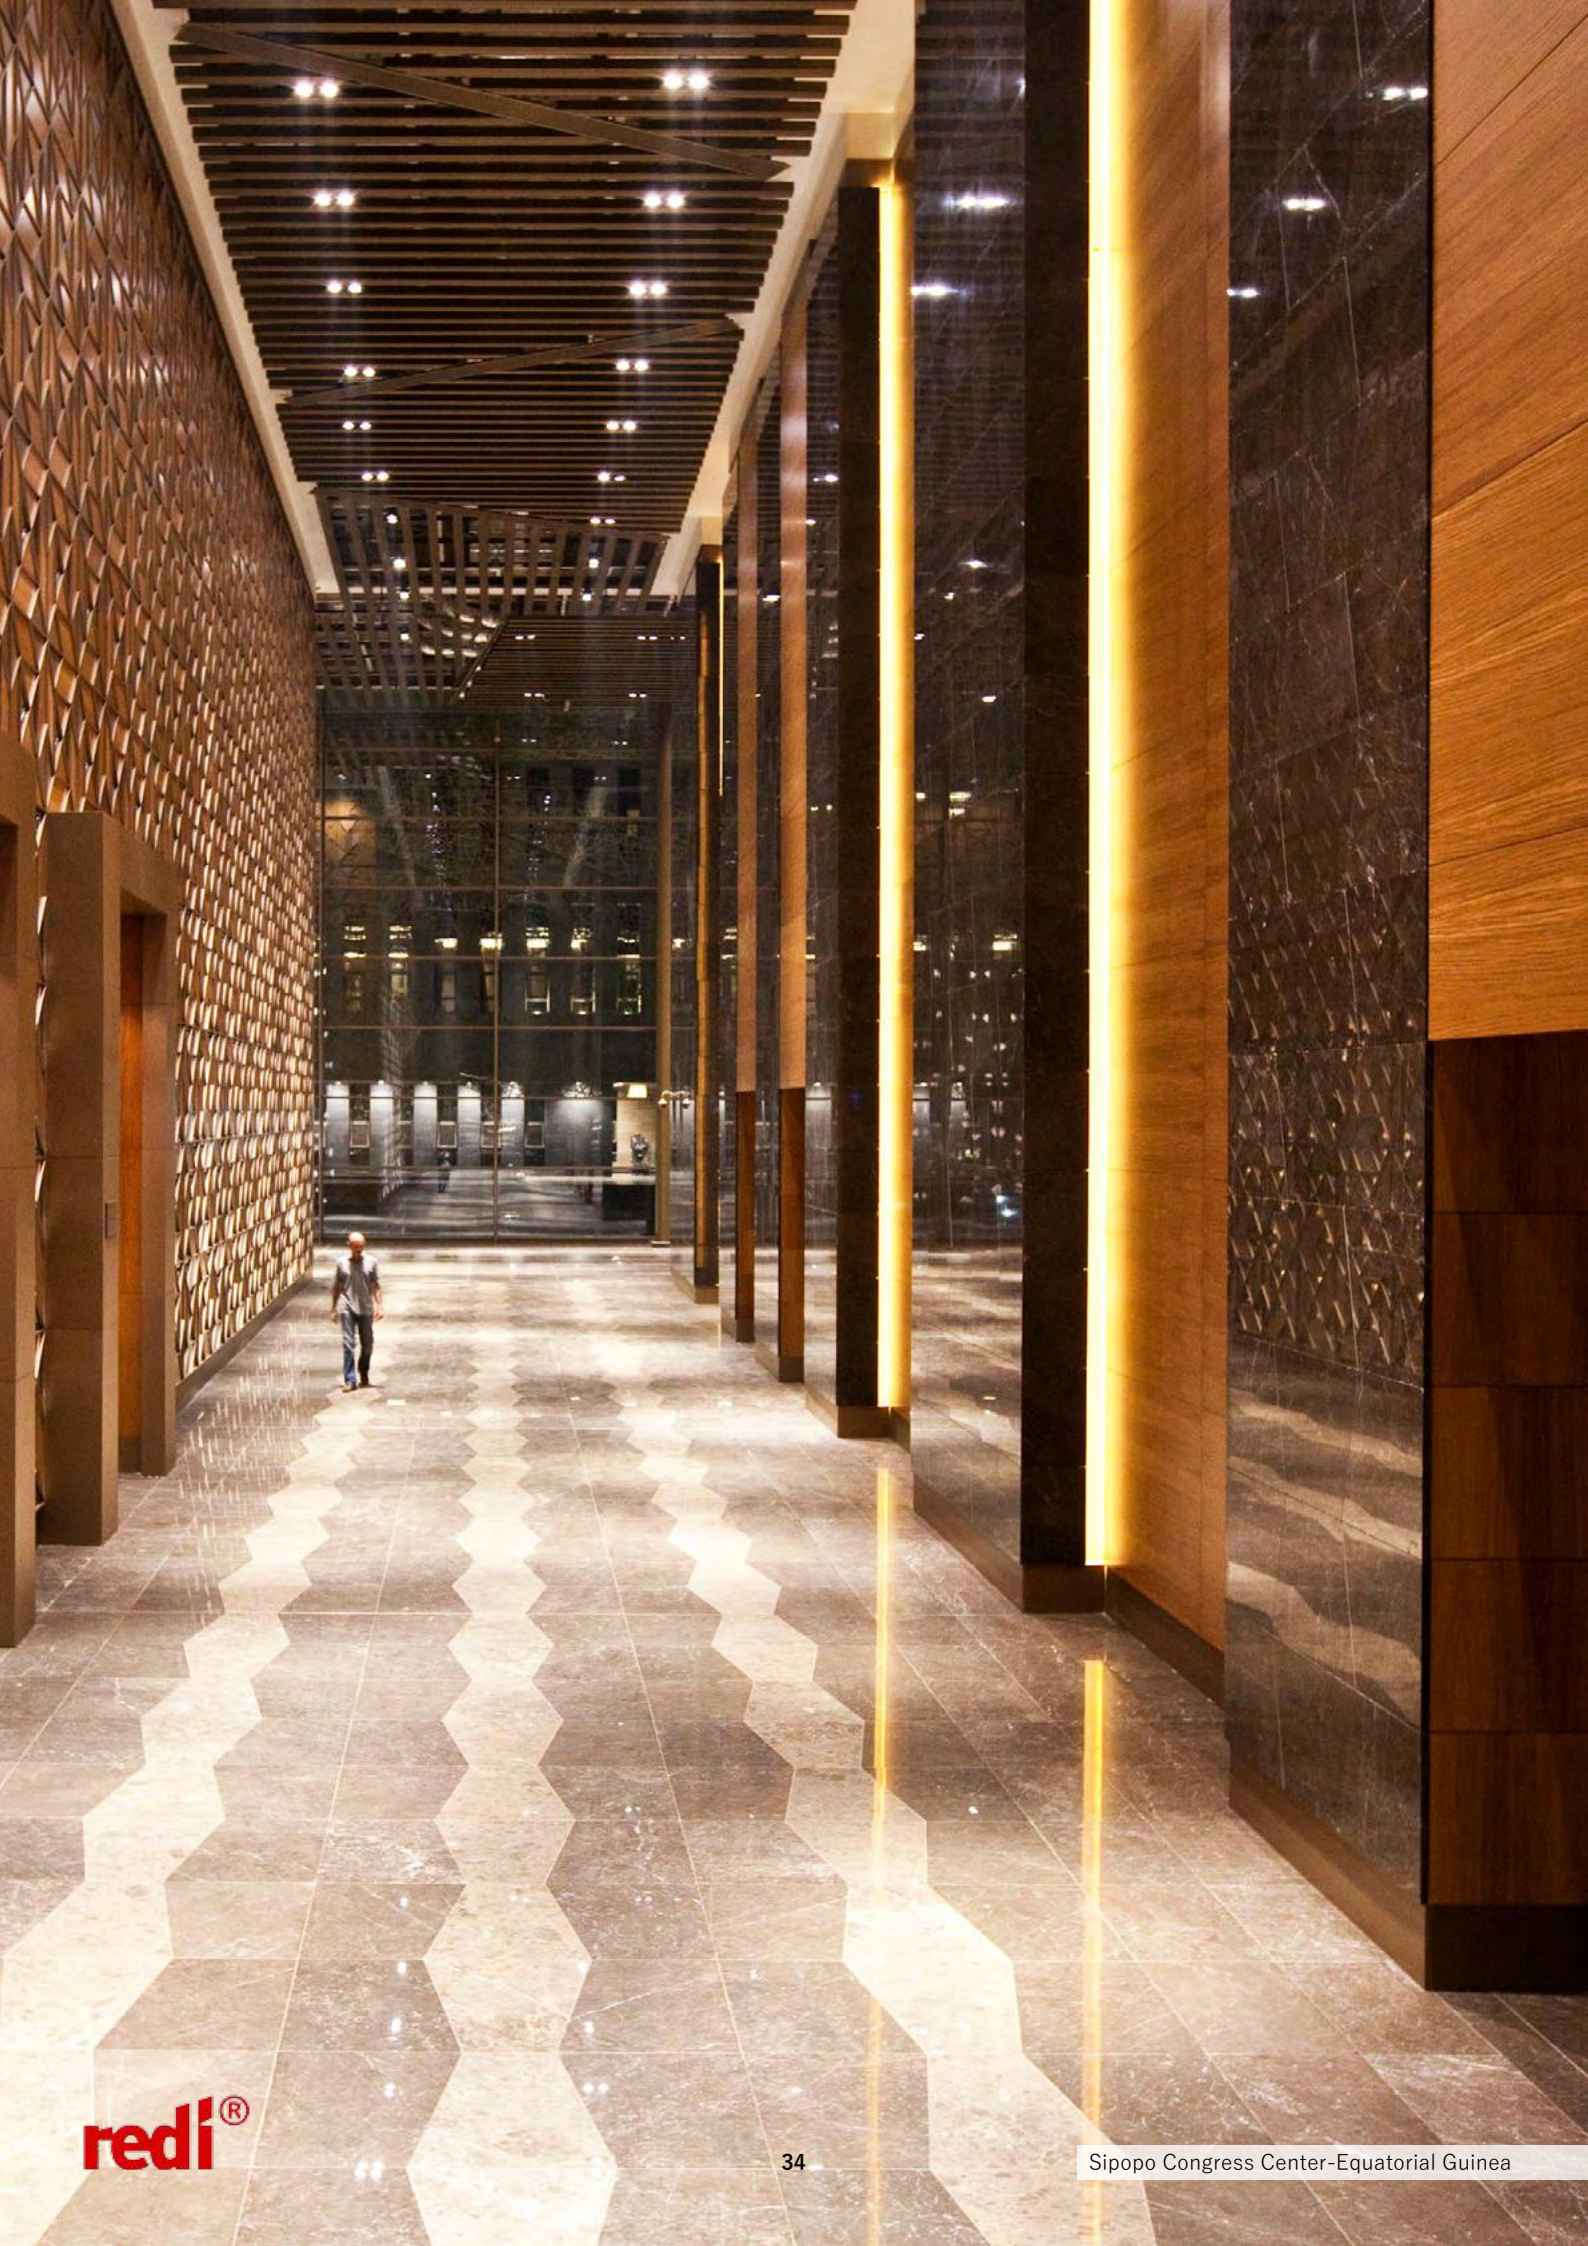

RD-M 3000



Code	LED	W	Min.Cutting
5016.60.5	60 LED	5W	100mm
5016.60.14	60 LED	14W	100mm

SURFACE MOUNTED 06



ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
Flexible LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
Esnek Şerit LED,
180° ışık çıkışı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

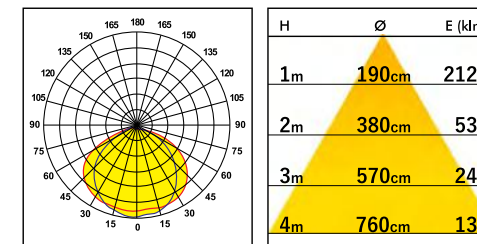

Osram OT Dali




IP40 Connection Socket
Bağlantı Soketi



RD 1000



Code	LED	W	Min.Cutting
5018.24.10	24 LED	10W	250mm
5018.36.14	36 LED	14W	100mm
5018.48.18	48 LED	18W	125mm
5018.60.24	60 LED	24W	100mm
5018.60.6	60 LED	6W	100mm
5018.72.8	72 LED	8W	83mm
5018.120.12	120 LED	12W	83mm
5018.160.16	160 LED	16W	100mm
5018.40.12	40 LED	12W	125mm
5018.60.18	60 LED	18W	100mm

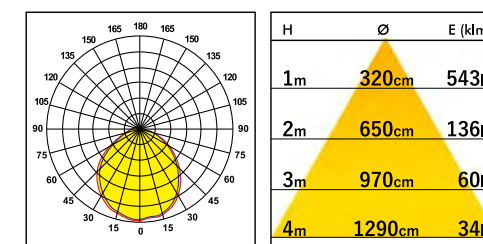

SURFACE MOUNTED 07


ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.


Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40, IP65,
SMD LED,
180° ışık çıkışı.

Kelvin (K)	Cover	IP
2700K	Clear/Şeffaf	IP40
3000K	Mat Opal	IP65
4000K		
5000K		
6000K		
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		





RD 3000

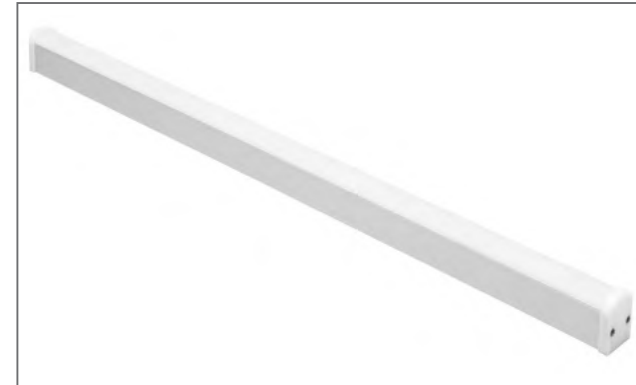

Code	LED	W	Min.Cutting
5019.24.10	24 LED	10W	250mm
5019.36.14	36 LED	14W	100mm
5019.48.18	48 LED	18W	125mm
5019.60.24	60 LED	24W	100mm
5019.60.6	60 LED	6W	100mm
5019.72.8	72 LED	8W	83mm
5019.120.12	120 LED	12W	83mm
5019.160.16	160 LED	16W	100mm
5019.40.12	40 LED	12W	125mm
5019.60.18	60 LED	18W	100mm

SURFACE MOUNTED 08



ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40, IP65,
SMD LED,
180° ışık çıkışı.

Kelvin (K)	Cover	IP
2700K	Clear/Şeffaf	IP40
3000K	Mat Opal	IP65
4000K		
5000K		
6000K		
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

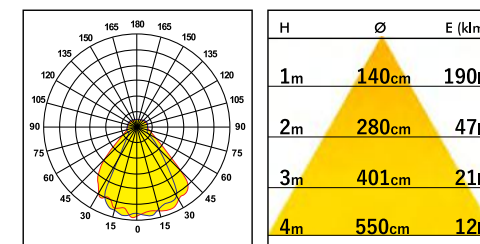

Osram OT Dali



LED DIMMER



Osram OT Dali



RGB DMX



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



RU 1000



SURFACE MOUNTED 09

ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
270° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40, IP65,
SMD LED,
270° ışık çıkışı.

Code	LED	W	Min.Cutting
5020.24.10	24 LED	10W	250mm
5020.36.14	36 LED	14W	100mm
5020.48.18	48 LED	18W	125mm
5020.60.24	60 LED	24W	100mm
5020.60.6	60 LED	6W	100mm
5020.72.8	72 LED	8W	83mm
5020.120.12	120 LED	12W	83mm
5020.160.16	160 LED	16W	100mm
5020.40.12	40 LED	12W	125mm
5020.60.18	60 LED	18W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	IP65
4000K	
5000K	
6000K	
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

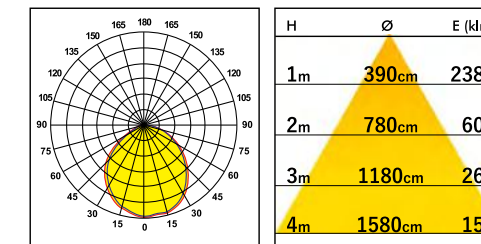

Osram OT Dali



LED DIMMER



Osram OT Dali



RGB DMX



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi


Lighting Design: Nergiz Arifoğlu
42 Maslak Tower-Istanbul



RU 3000



Code	LED	W	Min.Cutting
5021.24.10	24 LED	10W	250mm
5021.36.14	36 LED	14W	100mm
5021.48.18	48 LED	18W	125mm
5021.60.24	60 LED	24W	100mm
5021.60.6	60 LED	6W	100mm
5021.72.8	72 LED	8W	83mm
5021.120.12	120 LED	12W	83mm
5021.160.16	160 LED	16W	100mm
5021.40.12	40 LED	12W	125mm
5021.60.18	60 LED	18W	100mm

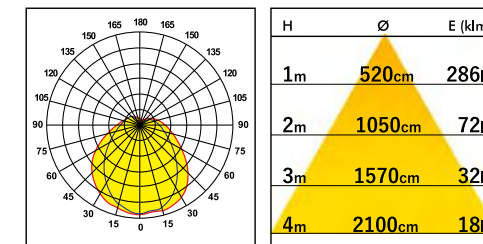

SURFACE MOUNTED 10


ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
270° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
270° ışık çıkışı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



Osram OT Dali




LED DIMMER



Osram OT Dali




RGB DMX



IP40 Connection Socket
Bağlantı Soketi

RP 2010

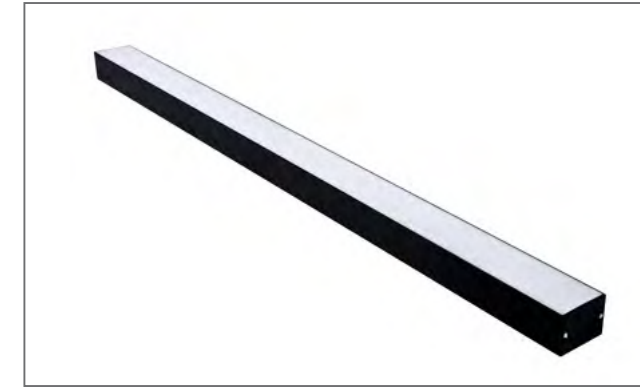


SURFACE MOUNTED 11

ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
180° ışık çıkışı.



Code	LED	W	Min.Cutting
5022.48.20	48 LED	20W	250mm
5022.72.28	72 LED	28W	100mm
5022.96.36	96 LED	36W	125mm
5022.120.48	120 LED	48W	100mm
5022.120.12	120 LED	12W	100mm
5022.144.16	144 LED	16W	83mm
5022.120.12	120 LED	12W	83mm
5022.320.32	320 LED	32W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

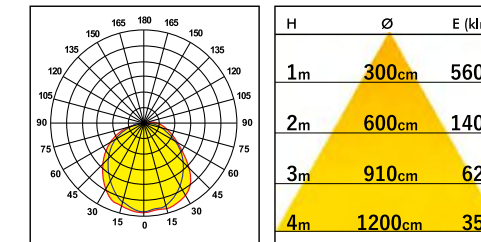

Osram OT Dali



LED DIMMER



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi



RP 2011


SURFACE MOUNTED 12

ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
24Vdc giriş,
IP40,
SMD LED,
180° ışık çıkışı.



Code	LED	W	Min.Cutting
5023.48.20	48 LED	20W	250mm
5023.72.28	72 LED	28W	100mm
5023.96.36	96 LED	36W	125mm
5023.120.48	120 LED	48W	100mm
5023.120.12	120 LED	12W	100mm
5023.144.16	144 LED	16W	83mm
5023.120.12	120 LED	12W	83mm
5023.320.32	320 LED	32W	100mm
5023.80.24	80 LED	24W	125mm
5023.120.36	120 LED	36W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

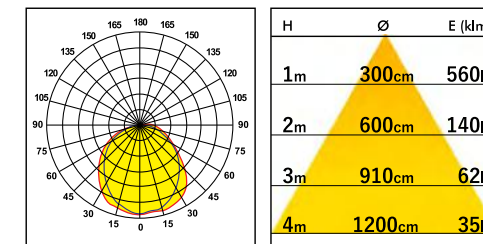

RS 2000



SURFACE MOUNTED 13

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP67
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum eloksallı
gövde,
24Vdc giriş,
IP40, IP67
SMD LED,
180° ışık çıkışı.




Code	LED	W	Min.Cutting
1211.120.12	120 LED	12W	1000mm
1211.160.16	160 LED	16W	1000mm
1211.40.20	40 LED	20W	1000mm
1211.60.24	60 LED	24W	1000mm

Kelvin (K)	IP
2700K	IP40
3000K	IP67
4000K	
5000K	
6000K	
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	250cm	1820lx
2m	510cm	455lx
3m	760cm	202lx
4m	1010cm	114lx



RTU 1000



SURFACE MOUNTED 14

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.

Polikarbon kapak,
Alüminyum eloksallı
gövde,
24Vdc giriş,
IP40, IP65,
SMD LED,
180° ışık çıkışı.




Code	LED	W	Min.Cutting
1213.24.10	24 LED	10W	250mm
1213.36.14	36 LED	14W	100mm
1213.48.18	48 LED	18W	125mm
1213.60.24	60 LED	24W	100mm
1213.60.6	60 LED	6W	100mm
1213.72.8	72 LED	8W	83mm
1213.120.12	120 LED	12W	83mm
1213.160.16	160 LED	16W	100mm
1213.40.12	40 LED	12W	125mm
1213.60.18	60 LED	18W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	IP65
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	310cm	1221lx
2m	620cm	305lx
3m	930cm	136lx
4m	1240cm	76lx



Osram OT Dali



LED DIMMER



Osram OT Dali



RGB DMX



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



Osram OT Dali




LED DIMMER



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



RL 1000



CLEAR FLEX LED F22


ESNEK LED



160° light output angle,
distance between
LEDs 16.7mm,
bendable up to 12cm,
continuous 10m
single end feed,
continuous 20m
two end feed,
24Vdc input voltage,
salt water resistant,
IP68 IK08 fire protection
and Anti-UV.

160° ışık çıkış açısı,
LED'ler arası
mesafe 16,7mm,
Max 12cm'ye kadar
bükülebilme,
kesintisiz 10m
tek uçtan besleme,
kesintisiz 20m iki
uçtan besleme,
24Vdc giriş voltajı,
Tuzlu suya dayanıklı,
P68 IK08 yangın
koruma ve Anti-UV.

Code	LED	W	Min.Cutting
1610.72.7	72 LED	7W	125mm
1610.60.12	60 LED	12W	100mm

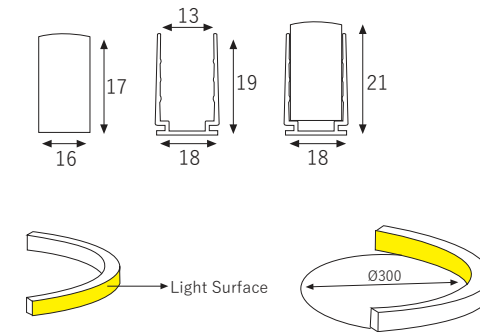

Kelvin (K)	IP
2700K	IP68
3000K	
4000K	
5000K	
6000K	
RGB	
RGB-W	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

Type 1

Single end feed: 10m;
Double end feed: 20m
(for diy connector)
Tek uç besleme: 10m;
Çift çıkış besleme: 20m
(konektörü için)



IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input
Enerji Girişi



Mounting Profile
Montaj Profili

Type 2

Single end feed: 7m;
Double end feed: 14m
(for injection moulding connector)
Tek uç besleme: 7 m;
Çift uçlu besleme: 14m
(enjeksiyon döküm bağlantısı için)



IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input-1
Enerji Girişi



IP68 Energy Input-2
Enerji Girişi



IP68 Energy Input-3
Enerji Girişi



RGB DMX



Osram OT Dali



Osram OT Dali



LED Dimmer

RL 1010



CLEAR FLEX LED F15

ESNEK LED





160° light output angle,
distance between
LEDs 11mm,
bendable up to 12cm,
continuous 10m
single end feed,
continuous 20m
two end feed,
24Vdc input voltage,
salt water resistant,
IP68 IK08 fire protection
and Anti-UV.

160° ışık çıkış açısı,
LED'ler arası
mesafe 11mm,
Max 12cm'ye kadar
bükülebilme,
kesintisiz 10m
tek uçtan besleme,
kesintisiz 20m iki
uçtan besleme,
24Vdc giriş voltajı,
Tuzlu suya dayanıklı,
P68 IK08 yangın
koruma ve Anti-UV.

Code	LED	W	Min.Cutting
1612.108.7	108 LED	7,2W	56mm
1612.108.12	108 LED	12W	56mm

Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K
RGB
RGB-W
RED
AMBER

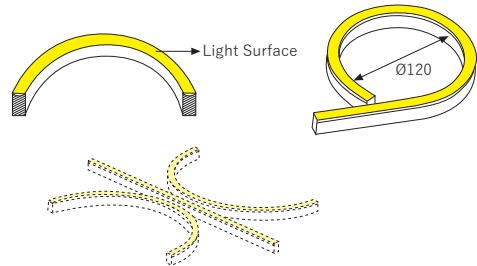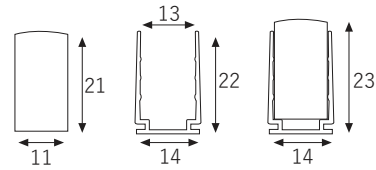

Type 1

Single end feed: 10m;
Double end feed: 20m
(for diy connector)
Tek uç besleme: 10m;
Çift çıkış besleme: 20m
(konektörü için)



IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input
Enerji Girişi



Mounting Profile
Montaj Profili

Type 2

Single end feed: 7m;
Double end feed: 14m
(for injection moulding connector)
Tek uç besleme: 7 m;
Çift uçlu besleme: 14m
(enjeksiyon döküm bağlantısı için)



IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input-1
Enerji Girişi



IP68 Energy Input-2
Enerji Girişi



IP68 Energy Input-3
Enerji Girişi



RGB DMX



Osram OT Dali



Osram OT Dali



LED Dimmer

RL 1020



CLEAR FLEX LED F10

ESNEK LED





160° light output angle,
distance between
LEDs 9mm,
bendable up to 12cm,
continuous 10m
single end feed,
continuous 20m
two end feed,
24Vdc input voltage,
salt water resistant,
IP68 IK08 fire protection
and Anti-UV.

160° ışık çıkış açısı,
LED'ler arası
mesafe 9mm,
Max 12cm'ye kadar
bükülebilme,
kesintisiz 10m
tek uçtan besleme,
kesintisiz 20m iki
uçtan besleme,
24Vdc giriş voltajı,
Tuzlu suya dayanıklı,
P68 IK08 yangın
koruma ve Anti-UV.

Code	LED	W	Min.Cutting
1613.92.3	92 LED	3,5W	125mm
1613.72.4	72 LED	4,5W	833mm
1613.72.7	72 LED	7,2W	125mm

Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K

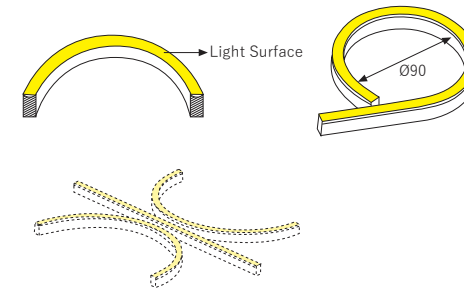

Type 1


Single end feed: 10m;
Double end feed: 20m
(for diy connector)
Tek uç besleme: 10m;
Çift çıkış besleme: 20m
(konektörü için)



IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input
Enerji Girişi



Mounting Profile
Montaj Profili

Type 2

Single end feed: 7m;
Double end feed: 14m
(for injection moulding connector)
Tek uç besleme: 7 m;
Çift uçlu besleme: 14m
(enjeksiyon döküm bağlantısı için)




IP68 Closing Cover
Sonlama Kapağı



IP68 Energy Input-1
Enerji Girişi



IP68 Energy Input-2
Enerji Girişi



IP68 Energy Input-3
Enerji Girişi



Osram OT Dali



Osram OT Dali



LED Dimmer



RS 1000



FLEX LED 01

ŞERİT LED




Flexible LED with
maximu 6cm bend,
Can be cut at 10 cm,
24Vdc input voltage.

Maksimum 6cm
bükülebilen esnek
şerit LED,
10cm'de kesilebilir,
24Vdc giriş voltajı.

Code	LED	W	Min.Cutting
6015.60.15	60 LED	15W	100mm
1088.108.8	108 LED	8W	100mm
6005.60.5	60 LED	5W	100mm
6012.60.12	60 LED	12W	100mm
1215.120.15	120 LED	15W	100mm

Kelvin (K)	IP
2700K	IP20
3000K	IP40
4000K	IP55
5000K	IP67
6000K	IP68
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



Osram OT Dali



LED DIMMER




Osram OT Dali



RGB DMX



IP40 Connection Socket
Bağlantı Soketi




IP65 Connection Socket
Bağlantı Soketi



RS 1001



Code	LED	W	Kelvin	Min.Cutting	Kelvin (K)	IP
81566.90.5	90 LED	5W	2700	100mm	2700K	IP67
81565.90.12	90 LED	12W	2700	100mm	4000K	
81567.90.5	90 LED	5W	4000	100mm		
81864.90.12	90 LED	12W	4000	100mm		
81860.90.12	80 LED	12W	RGB	100mm		



FLEX LED 02

ŞERİT LED



Flexible LED with
maximu 6cm bend,
Can be cut at 10 cm,
36Vdc input voltage.


Maksimum 6cm
bükülebilen esnek
şerit led,
10cm'de kesilebilir,
36Vdc giriş voltajı.



Driver



Osram OT Dali



IP67 Connection Socket
Bağlantı Soketi

RWS 1001



Code	LED	W	Min.Cutting
1212.60.24	60 LED	24W	1000mm
1212.120.12	120 LED	12W	1000mm
1212.160.16	160 LED	16W	1000mm

WALLWASHER 01


DIŞ CEPHE LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
Anti-UV,
24Vdc input,
IP67
SMD LED.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
Anti-UV,
24Vdc giriş,
IP67
SMD LED.

Kelvin (K)	IP
2700K	IP67
3000K	
4000K	
5000K	
6000K	
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



RWS 1000



Code	LED	W	Min.Cutting
1010.6.6	6 LED	6W	270mm
1010.6.12	6 LED	12W	270mm
1010.9.9	9 LED	9W	270mm
1010.12.12	12 LED	12W	500mm
1010.12.24	12 LED	24W	500mm
1010.18.18	18 LED	18W	500mm
1010.18.18	18 LED	18W	730mm
1010.18.36	18 LED	36W	730mm
1010.27.27	27 LED	27W	730mm
1010.24.24	24 LED	24W	970mm
1010.24.48	24 LED	48W	970mm
1010.36.36	36 LED	36W	970mm

WALLWASHER 02




DIŞ CEPHE LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
Anti-UV,
Constant current 350mA,
IP67
Power LED.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
Anti-UV,
Sabit akım 350mA,
IP67
Power LED.

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x 36°	
6000K	CUSTOM ANGLE	
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

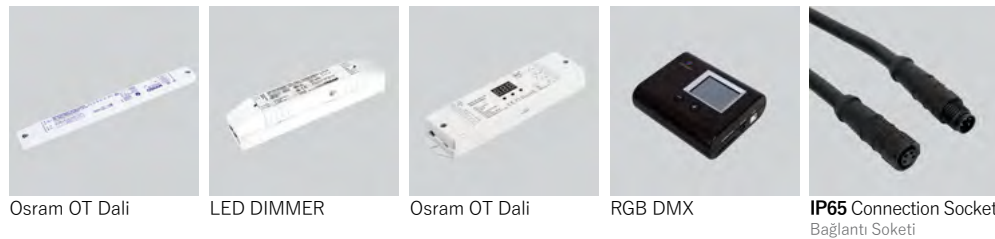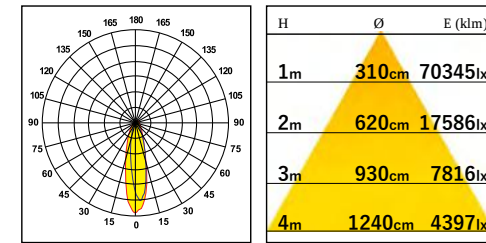


Osram OT Dali

LED DIMMER

Osram OT Dali

RGB DMX

IP65 Connection Socket
Bağlantı Soketi

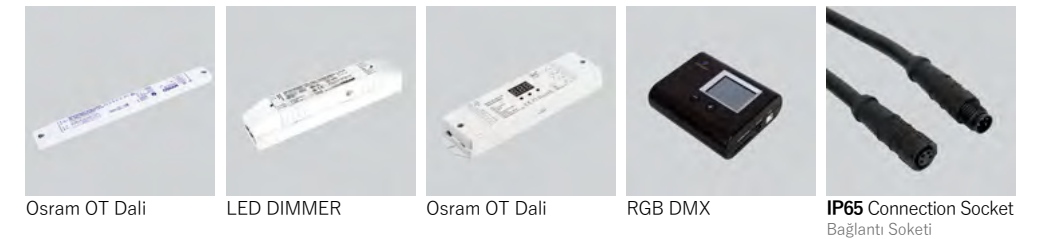

Osram OT Dali


LED DIMMER

Osram OT Dali

RGB DMX

IP65 Connection Socket
Bağlantı Soketi

RW 1002

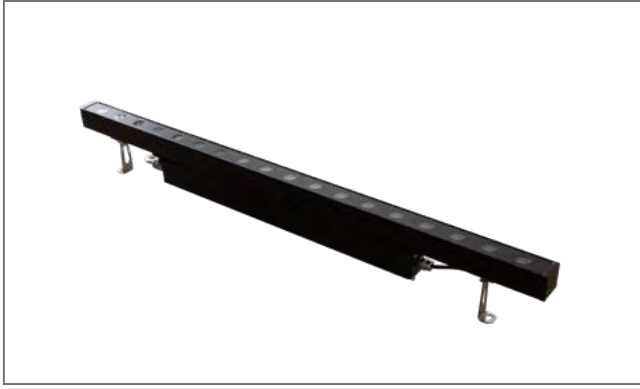

Code	LED	W	Min.Cutting
6469.6.6	6 LED	6W	270mm
6469.6.12	6 LED	12W	270mm
6469.12.12	12 LED	12W	500mm
6469.18.18	18 LED	18W	730mm
6469.24.24	24 LED	24W	970mm

WALLWASHER 06


DIŞ CEPHE LED PROFİL



Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
220Vac input,
IP67
Power LED.

Polikarbon kapak,
Alüminyum eloksallı
gövde,
Anti-UV,
220Vac giriş,
IP67
Power LED.

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



H	Ø	E (klm)
1m	310cm	70345lx
2m	620cm	17586lx
3m	930cm	7816lx
4m	1240cm	4397lx

RW 1001



Code	LED	W	Min.Cutting
6468.6.6	6 LED	6W	270mm
6468.6.12	6 LED	12W	270mm
6468.9.9	9 LED	9W	270mm
6468.12.12	12 LED	12W	500mm
6468.12.24	12 LED	24W	500mm
6468.18.18	18 LED	18W	500mm
6468.18.18	18 LED	18W	730mm
6468.18.36	18 LED	36W	730mm
6468.27.27	27 LED	27W	730mm
6468.24.24	24 LED	24W	970mm
6468.24.48	24 LED	48W	970mm
6468.36.36	36 LED	36W	970mm

WALLWASHER 03


DIŞ CEPHE LED PROFİL




Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
220Vac input,
IP67
Power LED.

Polikarbon kapak,
Alüminyum eloksallı
gövde,
Anti-UV,
220Vac giriş,
IP67
Power LED.

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



H	Ø	E (klm)
1m	310cm	70345lx
2m	620cm	17586lx
3m	930cm	7816lx
4m	1240cm	4397lx

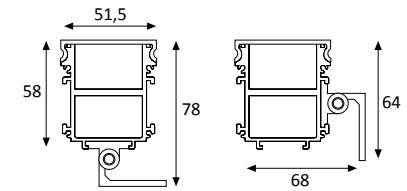

Osram OT Dali



LED DIMMER



Osram OT Dali



IP65 Connection Socket
Bağlantı Soketi



Osram OT Dali



LED DIMMER



Osram OT Dali




IP65 Connection Socket
Bağlantı Soketi

RW 1000



Code	LED	W	Min.Cutting
1012.6.6	6 LED	6W	270mm
1012.6.12	6 LED	12W	270mm
1012.9.9	9 LED	9W	270mm
1012.12.12	12 LED	12W	500mm
1012.12.24	12 LED	24W	500mm
1012.18.18	18 LED	18W	500mm
1012.18.18	18 LED	18W	730mm
1012.18.36	18 LED	36W	730mm
1012.27.27	27 LED	27W	730mm
1012.24.24	24 LED	24W	970mm
1012.24.48	24 LED	48W	970mm
1012.36.36	36 LED	36W	970mm



H	Ø	E (klm)
1m	310cm	70345lx
2m	620cm	17586lx
3m	930cm	7816lx
4m	1240cm	4397lx

WALLWASHER 04


DIŞ CEPHE LED PROFİLİ



Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
220Vac input,
IP67
Power LED.

Polikarbon kapak,
Alüminyum eloksal
gövde,
Anti-UV,
220Vac giriş,
IP67
Power LED.

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x 36°	
6000K	CUSTOM ANGLE	
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



Osram OT Dali



LED DIMMER



Osram OT Dali



RGB DMX




IP65 Connection Socket
Bağlantı Soketi

RWT 1000



Code	LED	W	Min.Cutting
1013.6.6	6 LED	6W	270mm
1013.6.12	6 LED	12W	270mm
1013.9.9	9 LED	9W	270mm
1013.12.12	12 LED	12W	500mm
1013.12.24	12 LED	24W	500mm
1013.18.18	18 LED	18W	500mm
1013.18.18	18 LED	18W	730mm
1013.18.36	18 LED	36W	730mm
1013.27.27	27 LED	27W	730mm
1013.24.24	24 LED	24W	970mm
1013.24.48	24 LED	48W	970mm
1013.36.36	36 LED	36W	970mm



H	Ø	E (klm)
1m	250cm	1021lx
2m	490cm	255lx
3m	740cm	113lx
4m	980cm	64lx

WALLWASHER 05


DIŞ CEPHE LED PROFİLİ



Polycarbonate cover.
Aluminum anodized
body.
Anti-UV.
Constant current
IP67,
Power LED,
Ø 37mm.

Polikarbon kapak.
Alüminyum eloksallı
gövde.
Anti-UV.
Sabit akım,
IP67,
Power LED,
Ø 37mm.

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



Osram OT Dali



LED DIMMER




Osram OT Dali




IP65 Connection Socket
Bağlantı Soketi



RWF 2000

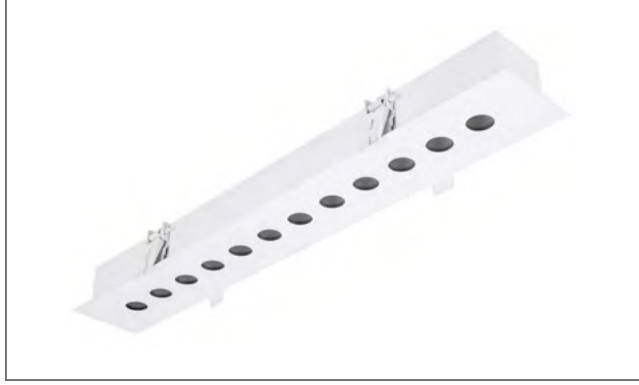

Code	LED	W	Min.Cutting
1410.6.6	6 LED	6W	270mm
1410.6.12	6 LED	12W	270mm
1410.9.9	9 LED	9W	270mm
1410.12.12	12 LED	12W	500mm
1410.12.24	12 LED	24W	500mm
1410.18.18	18 LED	18W	500mm
1410.18.18	18 LED	18W	730mm
1410.18.36	18 LED	36W	730mm
1410.27.27	27 LED	27W	730mm
1410.24.24	24 LED	24W	970mm
1410.24.48	24 LED	48W	970mm
1410.36.36	36 LED	36W	970mm



H	Ø	E (klm)
1m	310cm	70345lx
2m	620cm	17586lx
3m	930cm	7816lx
4m	1240cm	4397lx

CEILING RECESSED 01


ANKASTRE LED PROFİL



Aluminum anodized body.
IP40,
Power LED,
Constant current,
Hair plaster steel spring case.

Alüminyum eloksal gövde.
IP40,
Power LED,
Sabit akım,
Saç sıva altı çelik yaylı kasa.


Kelvin (K)	Beam Angles	IP
2700K	10°	IP40
3000K	28°	
4000K	46°	
5000K	12° x 36°	
6000K	CUSTOM ANGLE	
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



RR 1000



Code	LED	W	Min.Cutting
5111.120.48	120 LED	48W	100mm
5111.144.16	144 LED	16W	83mm
5111.144.42	144 LED	42W	83mm



H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1210cm	35lx

CEILING RECESSED 02


ANKASTRE LED PROFİL



Polycarbonate cover.
Aluminum anodized body,
IP40,
24Vdc input,
SMD LED,
180° light output,
Steel spring.

Polikarbon kapak.
Alüminyum eloksal gövde,
IP40,
24Vdc giriş,
SMD LED,
180° ışık çıkışı,
Çelik yay.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



Osram OT Dali



LED DIMMER



Osram OT Dali



RGB DMX



IP40 Connection Socket
Bağlantı Soketi



Osram OT Dali



LED DIMMER



Osram OT Dali




IP40 Connection Socket
Bağlantı Soketi

RSA 1000



Code	LED	W	Min.Cutting
5110.60.5	60 LED	5W	100mm
5110.60.14	60 LED	14W	100mm



CEILING RECESSED 03

ANKASTRE LED PROFİL




Polycarbonate cover.
Aluminum anodized
body,
IP40,
24Vdc input,
Flexible strip LED,
Steel spring,
120° light output.

Polikarbon kapak.
Alüminyum eloksallı
gövde,
IP40,
24Vdc giriş,
Esnek şerit LED,
Çelik yay,
120° ışık çıkışı.

Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER

RSA 1001



Code	LED	W	Min.Cutting
5112.120.48	120 LED	48W	100mm
5112.144.16	144 LED	16W	83mm
5112.144.42	144 LED	42W	83mm

CEILING RECESSED 04

ANKASTRE LED PROFİL





Polycarbonate cover.
Aluminum anodized
body,
IP40,
220 Vac input,
PCB LED,
Steel spring,
180° light output.

Polikarbon kapak.
Alüminyum eloksallı
gövde,
IP40,
220 Vac giriş,
PCB LED,
Çelik yay,
180° ışık çıkışı.

Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER

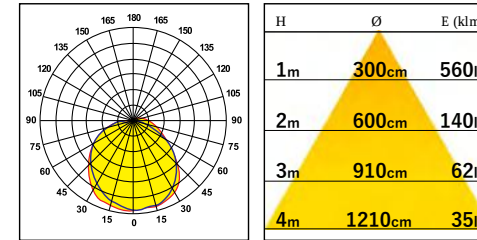

Osram OT Dali



LED DIMMER



Osram OT Dali



IP40 Connection Socket
Bağlantı Soketi



LED DIMMER




IP40 Connection Socket
Bağlantı Soketi

RDD 1000



Code	LED	W	mA
5113.1.1	1 LED	1W	350

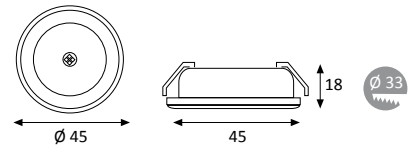

CEILING RECESSED 05

ANKASTRE LED SPOT



Aluminum anodized
body,
IP40,
Constant current,
Wide angle.

Alüminyum eloksal
gövde,
IP40,
Sabit akım,
Geniş açı.


Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K

RDA 1000



Code	LED	W	mA
5114.1.4	1 LED	4W	350-700

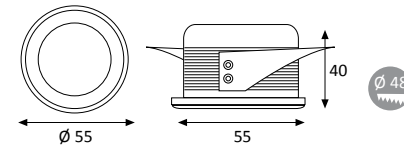

CEILING RECESSED 06

ANKASTRE LED SPOT



Aluminum anodized
body,
IP40,
Constant current,
40° light angle.

Alüminyum eloksal
gövde,
IP40,
Sabit akım,
40° ışık açısı.

Kelvin (K)	IP
------------	----

2700K
3000K
4000K
5000K
6000K



LED DIMMER



IP40 Connection Socket
Bağlantı Soketi



LED DIMMER



IP40 Connection Socket
Bağlantı Soketi

RWF 1000



Code	LED	W	Lenght
1110.6.6	6 LED	6W	290mm
1110.6.12	6 LED	12W	290mm
1110.9.9	9 LED	9W	290mm
1110.12.12	12 LED	12W	520mm
1110.12.24	12 LED	24W	520mm
1110.18.18	18 LED	18W	520mm
1110.18.18	18 LED	18W	750mm
1110.18.36	18 LED	36W	750mm
1110.27.27	27 LED	27W	750mm
1110.24.24	24 LED	24W	990mm
1110.24.48	24 LED	48W	990mm
1110.36.36	36 LED	36W	990mm

INGROUND 01


ZEMİN LED PROFİL



Tempered glass cover, Aluminum anodized body, 220Vac input, IP67, Power LED, Constant current, IK08

Temperli cam kapak, Alüminyum eloksallı gövde, 220Vac giriş, IP67, Power LED, Sabit akım, IK08

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x 36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		




⚠ Drainage is Neccessary/Drenaj Gereklidir.



Driver




Osram OT Dali



IP65 Connection Socket
Bağlantı Soketi

RF 1001

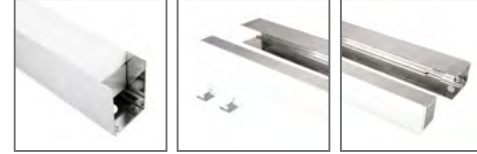

Code	LED	W	Lenght
1111.120.30	120 LED	30W	1000mm
1112.60.5	60 LED	5W	1000mm
1112.60.15	60 LED	15W	1000mm

INGROUND 02



ZEMİN LED PROFİL



Acrylic cover, Aluminum anodized body, 220Vac input, IP67, Flexible strip LED, IK08

Akrilik kapak, Alüminyum eloksallı gövde, 220Vac giriş, IP67, Esnek şerit LED, IK08

Kelvin (K)	IP
2700K	IP67
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

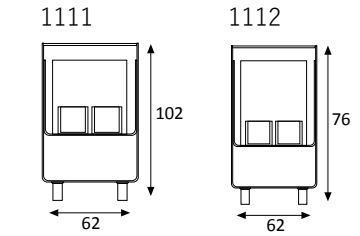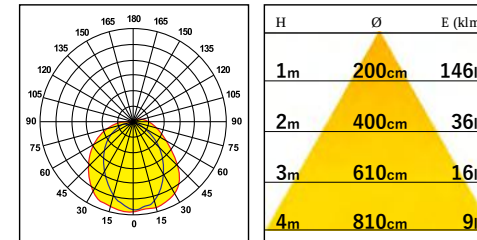

Driver




Osram OT Dali




IP65 Connection Socket
Bağlantı Soketi

RF 1000

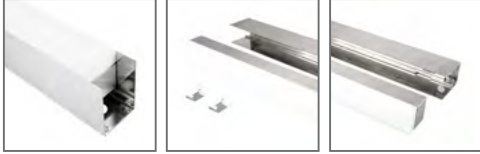

Code	LED	W	Lenght
1113.120.30	120 LED	30W	1000mm
1113.60.5	60 LED	5W	1000mm
1113.60.15	60 LED	15W	1000mm



H	Ø	E (klm)
1m	200cm	146lx
2m	400cm	36lx
3m	610cm	16lx
4m	810cm	9lx

INGROUND 03

ZEMİN LED PROFİLİ




Acrylic cover,
Aluminum
anodized body,
220Vac input,
IP67,
Flexible strip LED,
IK08.

Akrilik kapak,
Alüminyum
eloksallı gövde,
220Vac giriř,
IP67,
Esnek řerit LED,
IK08.

Kelvin (K)	IP
2700K	IP67


3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



RWK 1000



Code	LED	W	Lenght
1410.6.6	6 LED	6 W	270mm



GARDEN LIGHT

ÇİM SPOTU



Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
24Vdc input,
IP67,
Power LED.

Polikarbon kapak,
Alüminyum eloksallı
gövde,
Anti-UV,
24Vdc giriř,
IP67,
Power LED.

Kelvin (K)	IP
2700K	IP67

3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



Driver



Osram OT Dali



IP65 Connection Socket
Bağlantı Soketi



Driver



Osram OT Dali



IP65 Junction Box
Bağlantı Kutusu




IP65 Connection Socket
Bağlantı Soketi

RDZ 1000



Code	LED	W
1310.1.1	1 LED	1W



DRIVE OVER 01

ZEMİN LED



Stainless steel case,
220Vac,
IK08,
16° lens angle.

Paslanmaz çelik kasa,
220Vac,
IK08,
16° lens açısı.


Kelvin (K)	IP
2700K	IP67

3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM

RDZ 1001



Code	LED	W
1311.2.2	2 LED	2W



DRIVE OVER 02

ZEMİN LED



Stainless steel case,
220Vac,
IK08,
16° lens angle.

Paslanmaz çelik kasa,
220Vac,
IK08,
16° lens açısı.

Kelvin (K)	IP
2700K	IP67

3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



Driver



Osram OT Dali



IP65 Junction Box
Buat Kutusu



IP65 Connection Socket
Bağlantı Soketi



Driver



Osram OT Dali



IP65 Junction Box
Buat Kutusu



IP65 Connection Socket
Bağlantı Soketi

RU 2000



PENDANT 01 ALÜMİNYUM PROFİL SARKIT





Polycarbonate cover,
Aluminum
anodized body,
IP40
24Vdc input,
SMD LED,
270° light angle.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
IP40
24Vdc giriş,
SMD LED,
270° ışık açısı.

Code	LED	W	Min.Cutting
5210.24.10	24 LED	10W	250mm
5210.36.14	36 LED	14W	100mm
5210.48.18	48 LED	18W	125mm
5210.60.24	60 LED	24W	100mm
5210.60.6	60 LED	6W	100mm
5210.72.8	72 LED	8W	83mm
5210.120.12	120 LED	12W	83mm
5210.160.16	160 LED	16W	100mm
5210.40.12	40 LED	12W	125mm
5210.60.18	60 LED	18W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

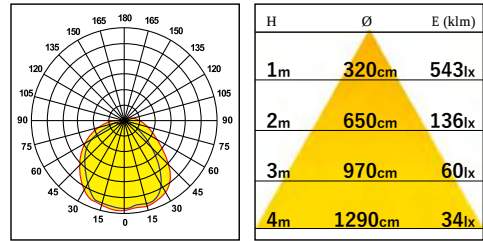


Osram OT Dali

LED DIMMER

Osram OT Dali

RU 2001



PENDANT 02 ALÜMİNYUM PROFİL SARKIT





Polycarbonate cover,
Aluminum
anodized body,
IP40
24Vdc input,
SMD LED,
270° light angle.

Polikarbon kapak,
Alüminyum
eloksallı gövde,
IP40
24Vdc giriş,
SMD LED,
270° ışık açısı.

Code	LED	W	Min.Cutting
5211.24.10	24 LED	10W	250mm
5211.36.14	36 LED	14W	100mm
5211.48.18	48 LED	18W	125mm
5211.60.24	60 LED	24W	100mm
5211.60.6	60 LED	6W	100mm
5211.72.8	72 LED	8W	83mm
5211.120.12	120 LED	12W	83mm
5211.160.16	160 LED	16W	100mm
5211.40.12	40 LED	12W	125mm
5211.60.18	60 LED	18W	100mm

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

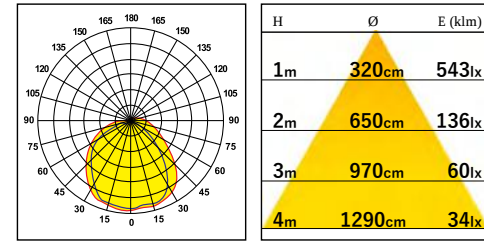

Osram OT Dali

LED DIMMER

Osram OT Dali

RP 2001



Code	LED	W	Min.Cutting
5212.24.10	24 LED	10W	250mm
5212.36.14	36 LED	14W	100mm
5212.48.18	48 LED	18W	125mm
5212.60.24	60 LED	24W	100mm
5212.60.6	60 LED	6W	100mm
5212.72.8	72 LED	8W	83mm
5212.120.12	120 LED	12W	83mm
5212.160.16	160 LED	16W	100mm
5212.40.12	40 LED	12W	125mm
5212.60.18	60 LED	18W	100mm

PENDANT 03



ALÜMİNYUM PROFİL SARKIT



Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.

Polikarbon kapak,
Alüminyum eloksal
gövde,
IP40
220Vac giriş,
SMD LED,
180° ışık açısı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

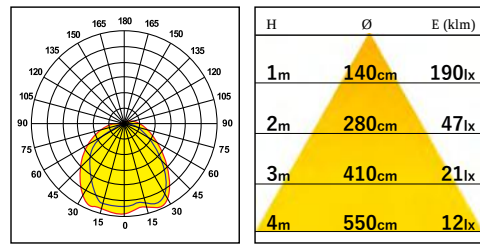

Osram OT Dali

LED DIMMER

Osram OT Dali

RP 2000



Code	LED	W	Min.Cutting
5213.120.48	120 LED	48W	100mm
5213.144.16	144 LED	16W	83mm
5213.144.42	144 LED	24W	83mm

PENDANT 04



ALÜMİNYUM PROFİL SARKIT



Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.

Polikarbon kapak,
Alüminyum eloksal
gövde,
IP40
220Vac giriş,
SMD LED,
180° ışık açısı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

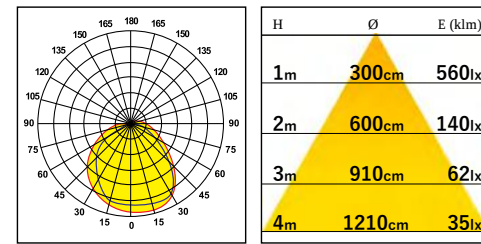


Osram OT Dali

LED DIMMER

Osram OT Dali

RV 2000



Code	LED	W	Min.Cutting
5214.120.48	120 LED	48W	100mm
5214.144.16	144 LED	16W	83mm
5214 .144.42	144 LED	421W	83mm

PENDANT 05



ALÜMİNYUM PROFİL SARKIT



Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.

Polikarbon kapak,
Alüminyum eloksal
gövde,
IP40
220Vac giriş,
SMD LED,
180° ışık açısı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

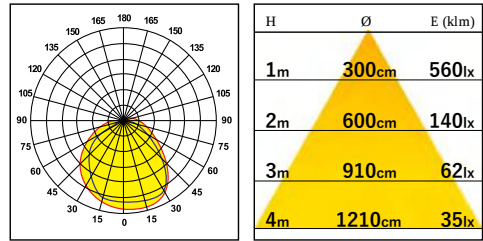

Osram OT Dali



LED DIMMER



Osram OT Dali

RP 3000



Code	LED	W	Min.Cutting
5215.60.6	60 LED	6W	100mm
5215.72.8	72 LED	8W	83mm
5215.72.18	72 LED	18W	83mm
5215.120.12	120 LED	12W	83mm

PENDANT 06



ALÜMİNYUM PROFİL SARKIT



Polycarbonate tube body,
Aluminum anodized
inner body,
IP40,
24Vdc input,
SMD LED,
180 ° light angle.

Polikarbon tüp gövde,
Alüminyum
eloksal iç gövde,
IP40,
24Vdc giriş,
SMD LED,
180° ışık açısı.

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	

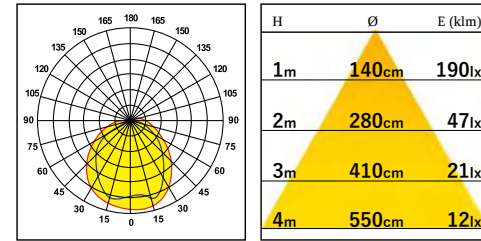

Osram OT Dali



LED DIMMER




Osram OT Dali

RD DK 1000



Code	Bulb	W	Kelvin (K)	IP
216.6	E-27	6W	2700K	IP40
216.8	E-27	8W	3000K	
216.10	E-27	10W	5000K	
216.15	E-27	15W		

PENDANT ALÜMİNYUM PROFİL SARKIT



RD SC 1000




Code	LED	W	Min.Cutting
5218.60.15	60 LED	15W/m	24Vdc
5218.120.12	120 LED	12W/m	24Vdc
Ø60 - Ø 90 - Ø120			

PENDANT xx ALÜMİNYUM PROFİL SARKIT



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	

RD 6 1000




Code	LED	W
5217.60.15	60 LED	15W/m 24Vdc
5217.120.12	120 LED	12W/m 24Vdc
Custom Size		

PENDANT ALÜMİNYUM PROFİL SARKIT



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	

RD DV 1000



Code	LED	W	Min.Cutting
5219.60.15	60 LED	15W/m	24Vdc
5219.120.12	120 LED	12W/m	24Vdc
Ø60 - Ø 90 - Ø120			



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	



www.redi.com.tr