

Technical Product Catalog

Accessories/ Aksesuarlar




Osram OT Dali	Osram OT Dali	LED Dimmer	Touch Panel	RGB DMX Controller	RGB IP40 Connection Socket Bağlantı Soketi
RGB IP68 Connection Socket Bağlantı Soketi	IP68 Connect Socket Bağlantı Soketi	IP68 Connection Socket Bağlantı Soketi	IP68 Connection Socket Bağlantı Soketi	IP40 Connection Socket Bağlantı Soketi	IP67 Hihlinear Socket Bağlantı Soketi
IP40 Junction Box Buat Kutusu	IP67 Junction Box Buat Kutusu	IP68 Junction Box Buat Kutusu	IP68 Junction Box Buat Kutusu	IP68 Junction Box Buat Kutusu	IP68 Junction Box Buat Kutusu
Rectangular Stalactite Rozans	Conical Stalactite Rozans	45° Junction Klips	Standard Junction Klips	Metal Key Box Anahtar Kasası	Spot Ring Mountin Pulley xx
IP68 Junction Box Buat Kutusu	DMX512 Series LED Controller	Mounted LED Controller	IP68 LED Driver	IP20 LED Driver	STEEL HANGER

INDEX

ALÜMİNYUM LED PROFİL SURFACE MOUNTED



ESNEK ŞERİT LED CLEAR FLEX LED

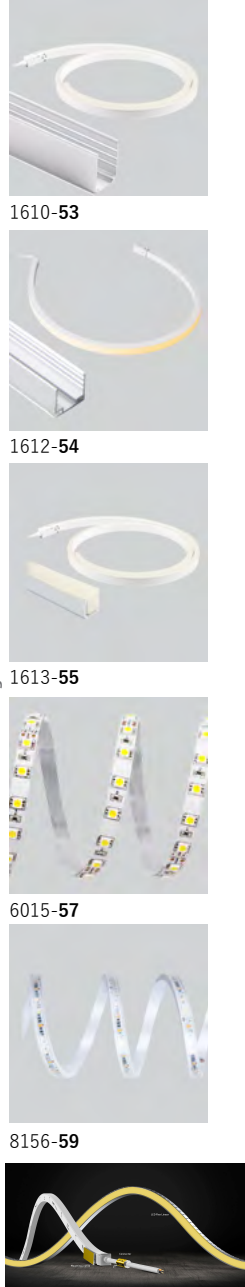

DIŞ CEPHE LED PROFİL WALLWASHER



ANKASTRE LED CEILING RECESSED




ZEMİN LED PROFİL INGROUND



ALÜMİNYUM PROFİL SARKIT PENDANT



RK-3000

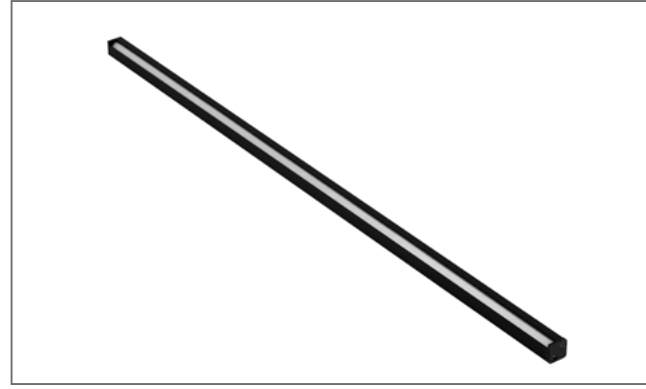

Code	LED	Output	W	Min.Cutting
5010.158.10	158 LED	24Vdc	10W	45mm
5010.12.12	12 LED	12Vdc	12W	31mm

SURFACE MOUNTED 01


ALÜMİNYUM LED PROFİL




Plexi cover,
Aluminum
anodized body,
IP40,
SMD LED,
140° light output.



Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	230cm	20lx
2m	460cm	5lx
3m	690cm	2lx
4m	920cm	1lx



RK-1000



Code	LED	W	Min.Cutting
5011.60.6	60 LED	6W	100mm
5011.72.8	72 LED	8W	83mm
5011.120.12	120 LED	12W	83mm

SURFACE MOUNTED 02


ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
150° light output.




Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	300cm	94lx
2m	590cm	24lx
3m	890cm	10lx
4m	1180cm	6lx




IP40 Connection Socket
Bağlantı Soketi



IP40 Connection Socket
Bağlantı Soketi



RK-4000

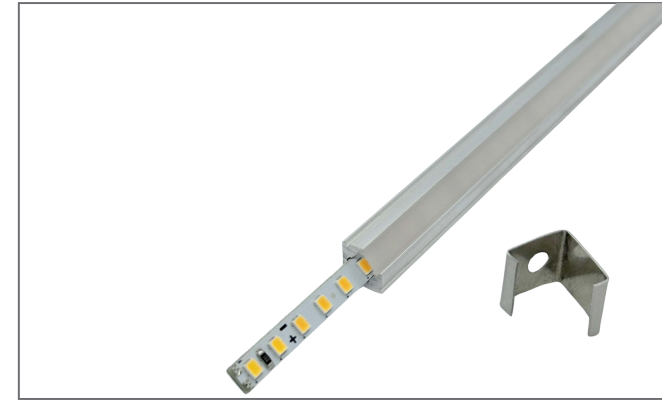

SURFACE MOUNTED 05

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.





Code	LED	W	Min.Cutting
5014.120	120 LED	CUSTOM	55mm
5014.140	140 LED	CUSTOM	55mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K) **IP**
2700K IP40
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM

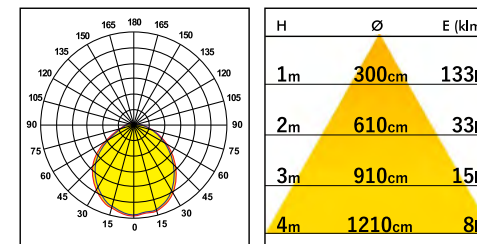

Profile Dimensions:

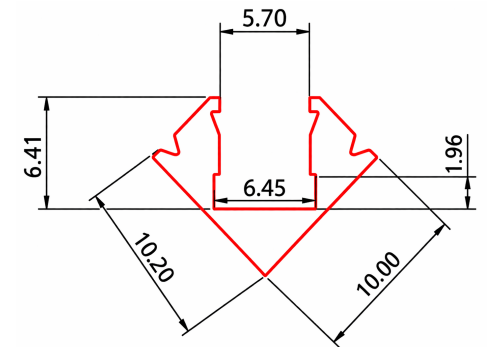

IP40 Connection Socket
Bağlantı Soketi

RD-M 1000



SURFACE MOUNTED 05

ALÜMİNYUM LED PROFİL






Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

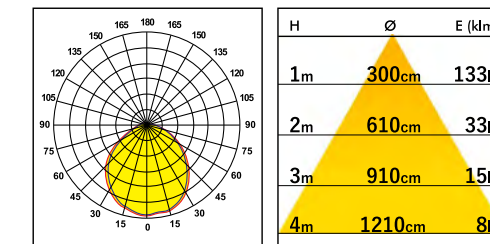

IP40 Connection Socket
Bağlantı Soketi

RDM 1000



SURFACE MOUNTED 03

ALÜMİNYUM LED PROFİL






Polycarbonate cover.
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm


CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

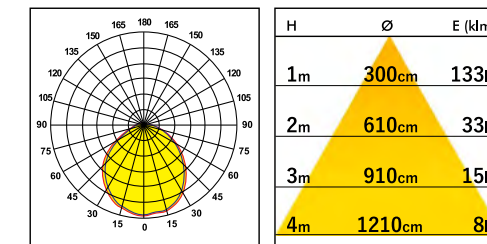

IP40 Connection Socket
Bağlantı Soketi

RDM-2000

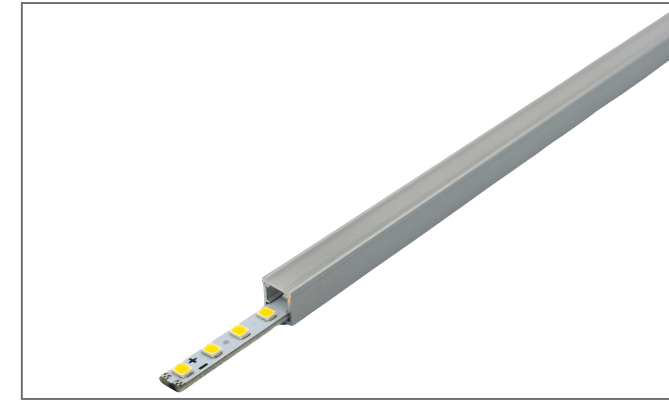

SURFACE MOUNTED 05 ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.





Code	LED	W/M	Min.Cutting
5014.120	120LED	CUSTOM	55MM

CRI	LED CHIPS	W/M
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

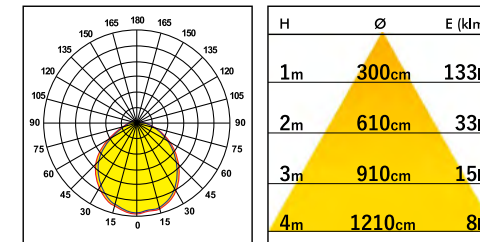


Profile Dimensions:

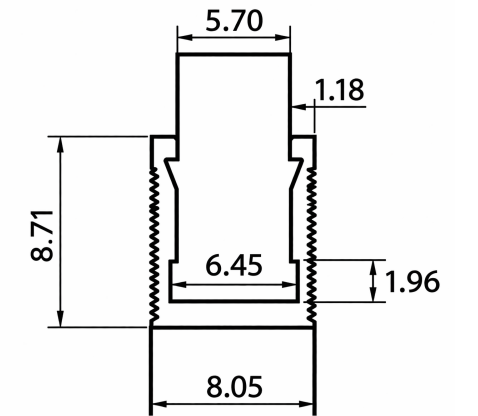

IP40 Connection Socket
Bağlantı Soketi



RD 1000

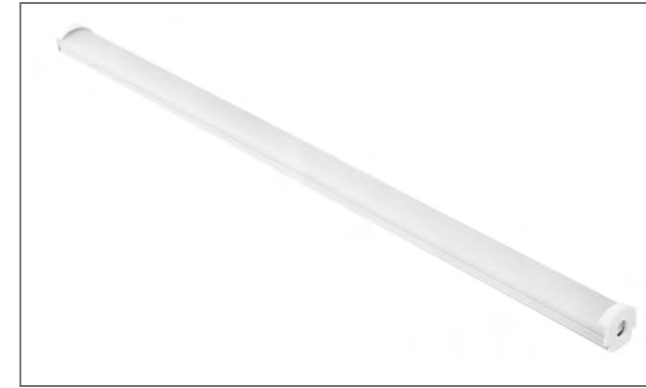

Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

SURFACE MOUNTED 07



ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.



Kelvin (K)	Cover	IP
2700K	Clear/Şeffaf	IP40
3000K	Mat Opal	IP65
4000K		
5000K		
6000K		
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

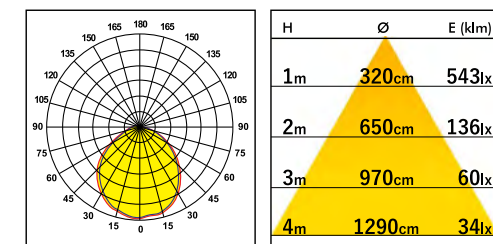

IP40 Connection Socket
Bağlantı Soketi




IP65 Connection Socket
Bağlantı Soketi

RDL 1000

SURFACE MOUNTED 05

ALÜMİNYUM LED PROFİL

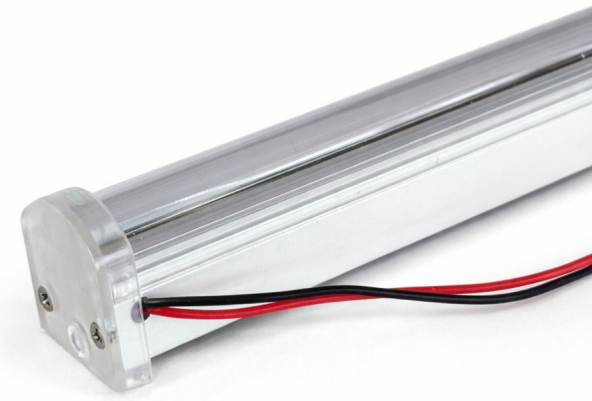



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

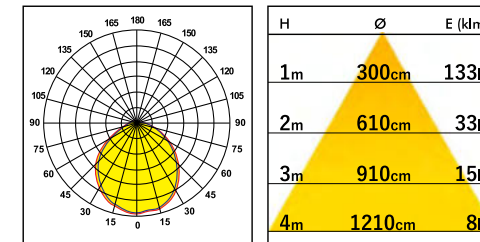

IP40 Connection Socket
Bağlantı Soketi



RFW 1001



LINEAR WALLWASHER

İÇ CEPHE LED PROFİL




Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
input CC-350mA,
IP44
Power LED.

Polikarbon kapak,
Alüminyum eloksal
gövde,
Anti-UV,
giriş CC-350mA,
IP44
Power LED.




Code	LED	W	Min.Cutting
2000.8.8	8 LED	8W	200mm
2000.12.12	12 LED	12W	310mm
2000.24.24	24 LED	24W	630mm
2000.36.36	36 LED	36W	930mm


Kelvin (K)	B	IP
2200K	15°	IP44
2400K	28°	
2700K	45°	
3000K	20° x 45°	
4000K		
5000K	LEDiL	
6000K		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



Dimensions: 295.0 mm x 16.0 mm
Height: 8.00 mm
~17° spot beam





Dimensions: 295.0 mm x 16.0 mm
Height: 8.00 mm
~25° medium beam



Dimensions: 295.0 mm x 16.0 mm
Height: 8.00 mm
~45° + 20° oval beam

DİMENSIÖN

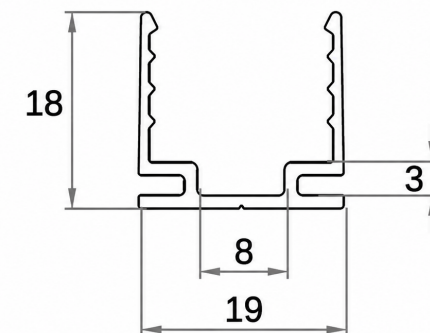

IP40 Connection Socket
Bağlantı Soketi



RD-M 3000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

SURFACE MOUNTED 06



ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
Flexible LED,
180° light output.




Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

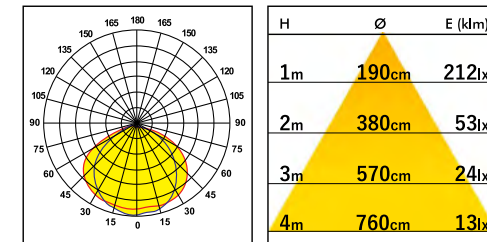

IP40 Connection Socket
Bağlantı Soketi

RD 3000

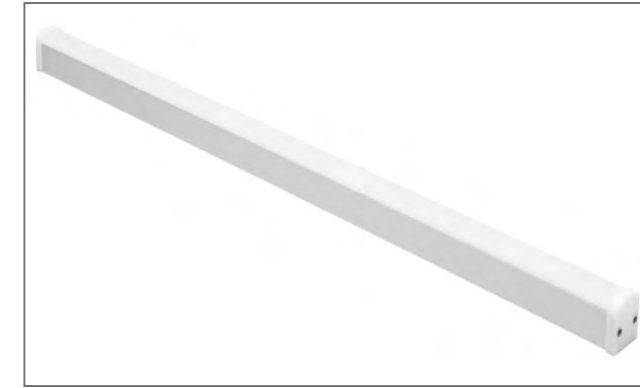

SURFACE MOUNTED 08

ALÜMİNYUM LED PROFİL







Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	Cover	IP
2700K	Clear/Şeffaf	IP40
3000K	Mat Opal	IP65
4000K		
5000K		
6000K		
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

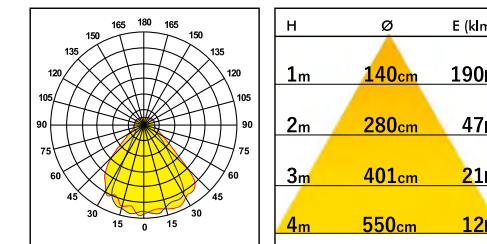

IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi

RD-M 2000



SURFACE MOUNTED 04

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
Flexible LED,
140° light output.





Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	200cm	146lx
2m	400cm	36lx
3m	610cm	16lx
4m	810cm	9lx



IP40 Connection Socket
Bağlantı Soketi



R-FLX1010

LED NEON FLEXIBLE




160° light output angle,
bendable up to 10cm,
continuous 10m
single end feed,
continuous 20m
two end feed,
24Vdc input voltage, salt
water resistant, IP65
IK08 fire protection and
Anti-UV.






CRI	LED CHIPS	W
80	120LED/M	5-12
90	120LED/M	5-12

- Kelvin (K) IP**
- 2200K IP66
 - 2400K IP65
 - 2700K
 - 3000K
 - 4000K
 - 5000K
 - 6000K
 - RED
 - GREEN
 - BLUE
 - AMBER
 - CUSTOM

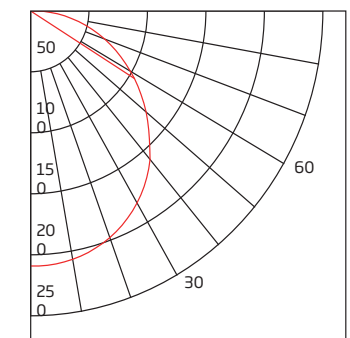

Profile Dimensions

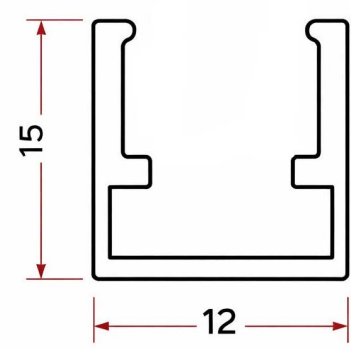



R-FLX1414

Flexible LED Neon



160° light output angle,
bendable up to continuous
5m single two end
feed,10m 24Vdc input
voltage, salt water
resistant, IP65-66 IK08 fire
protection and Anti-UV.





3-STEP
MACADAM


CRI	LED CHIPS	W
80	120LED/M	5-12
90	120LED/M	5-12

Kelvin (K) IP



2200K IP66
2400K IP65
2700K
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



LIGHT SURFACE





Horizontal Bending



Vertical Bending

Profile Dimensions

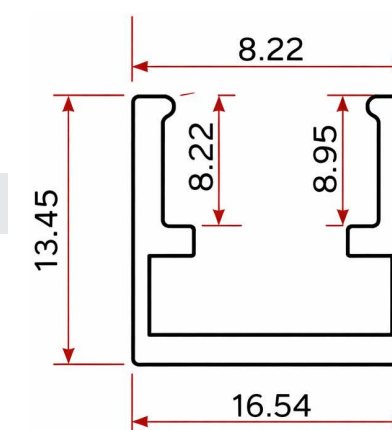



R-FLX2222
LED NEON FLEXIBLE





160° light output angle,
bendable up to
continuous 5m single
two end feed,10m
24Vdc input voltage, salt
water resistant, IP65-66
IK08 fire protection and
Anti-UV.




CRI	LED CHIPS	W
80	120LED/M	5-12
90	120LED/M	5-12

Kelvin (K) IP	
2200K	IP66
2400K	IP65
2700K	
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

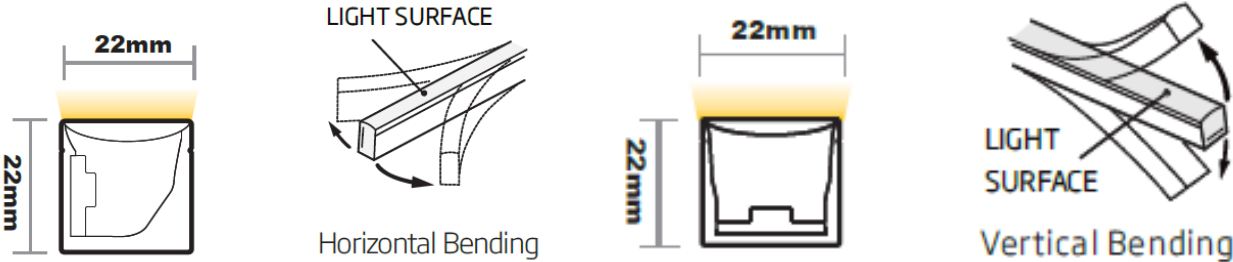

Profile Dimensions:

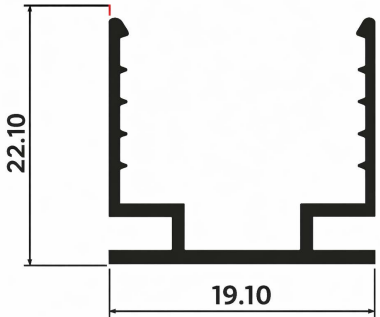

ALUMINUM MOUNTING PROFILE





R-FLX5010
LED NEON FLEXIBLE



Bendable up to 10cm,
continuous 10m
single end feed,
continuous 20m
two end feed,
24Vdc input voltage,
salt water resistant,
IP65 IK08 fire protection
and Anti-UV.





Vertical

Horizontal


Code	LED CHIPS	W
FLX120	120LED/M	6W/M

CRI	LED CHIPS	W
80	120LED/M	6W/M
90	120LED/M	6W/M



Kelvin (K)	IP
2400K	IP65
2700K	
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

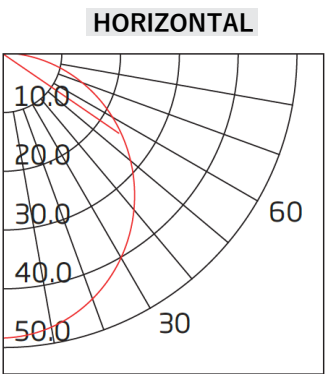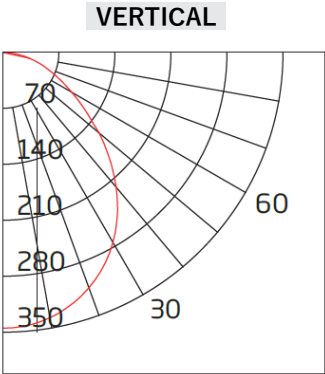

DRAWING SIDE BEND

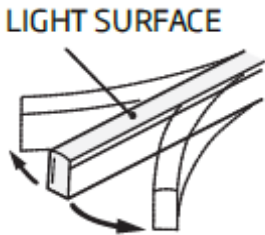

Horizontal Bending

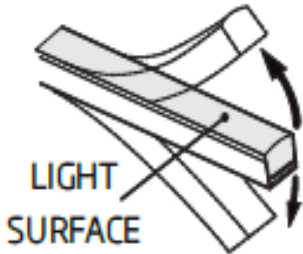

Vertical Bending





RU 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

redi®

SURFACE MOUNTED 09




ALÜMİNYUM LED PROFİL



Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
270° light output.



Kelvin (K)	IP
2700K	IP40
3000K	IP65
4000K	
5000K	
6000K	
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

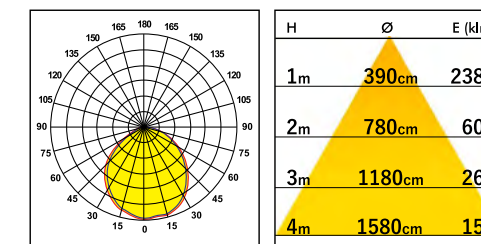

IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



Lighting Design: Nergiz Arifoğlu
42 Maslak Tower-Istanbul



P40 Connection Socket
Bağlantı Soketi



RP 2010

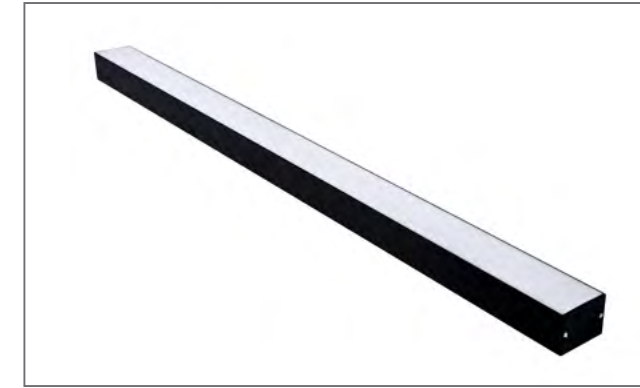

SURFACE MOUNTED 11

ALÜMİNYUM LED PROFİL






Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

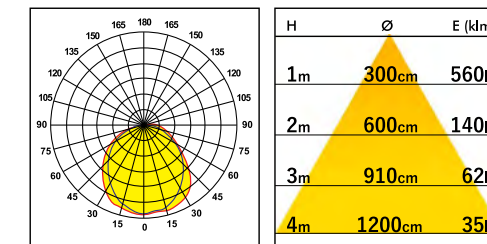

IP40 Connection Socket
Bağlantı Soketi



RP 2011



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

SURFACE MOUNTED 12

ALÜMİNYUM LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40,
SMD LED,
180° light output.



Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	

H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1200cm	35lx



IP40 Connection Socket
Bağlantı Soketi

RS 2000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

SURFACE MOUNTED 13

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP67
SMD LED,
180° light output.




Kelvin (K)	IP
2700K	IP40
3000K	IP67
4000K	
5000K	
6000K	

RGB
RED
GREEN
BLUE
AMBER
CUSTOM



H	Ø	E (klm)
1m	250cm	1820lx
2m	510cm	455lx
3m	760cm	202lx
4m	1010cm	114lx



RTU 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

SURFACE MOUNTED 14

ALÜMİNYUM LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP40, IP65,
SMD LED,
180° light output.





Kelvin (K)	IP
2700K	IP40
3000K	IP65
4000K	
5000K	
6000K	

RED
GREEN
BLUE
AMBER
CUSTOM



H	Ø	E (klm)
1m	310cm	1221lx
2m	620cm	305lx
3m	930cm	136lx
4m	1240cm	76lx



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi



RS 1000



FLEX LED 01

ŞERİT LED



Flexible LED with
maximu 6cm bend,
Can be cut at 10 cm,
24Vdc input voltage.



Maksimum 6cm



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

Kelvin (K)	IP
2700K	IP20
3000K	IP40
4000K	IP55
5000K	IP67
6000K	IP68
RGB	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



IP40 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi




RS 1001



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM



FLEX LED 02


ŞERİT LED



Flexible LED with
maximu 6cm bend,
Can be cut at 10 cm,
36Vdc input voltage.



Kelvin (K)	IP
2700K	IP67
4000K	



IP67 Connection Socket
Bağlantı Soketi

RWS 1001



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

WALLWASHER 01

DIŞ CEPHE LED PROFİL




Polycarbonate cover,
Aluminum
anodized body,
Anti-UV,
24Vdc input,
IP67
SMD LED.



Kelvin (K)	IP
2700K	IP67
3000K	
4000K	
5000K	
6000K	

RGB
RED
GREEN
BLUE
AMBER
CUSTOM



RWS 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

WALLWASHER 02

DIŞ CEPHE LED PROFİL





Polycarbonate cover,
Aluminum
anodized body,
Anti-UV,
Constant current 350mA,
IP67
Power LED.



Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	

RGB
RED
GREEN
BLUE
AMBER
CUSTOM

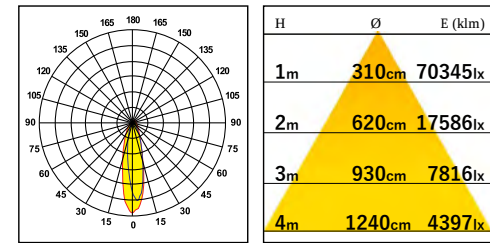


IP65 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi

RW 1002

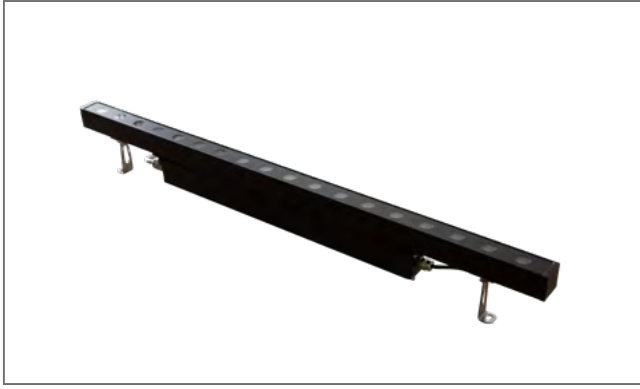


Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm


CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

WALLWASHER 06

DIŞ CEPHE LED PROFİL

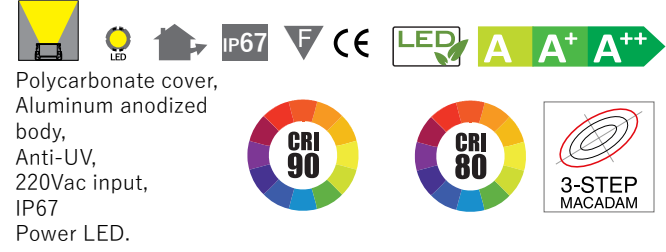

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

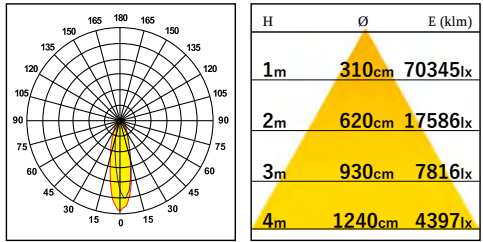

RW 1001




Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm



CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

WALLWASHER 03

DIŞ CEPHE LED PROFİL

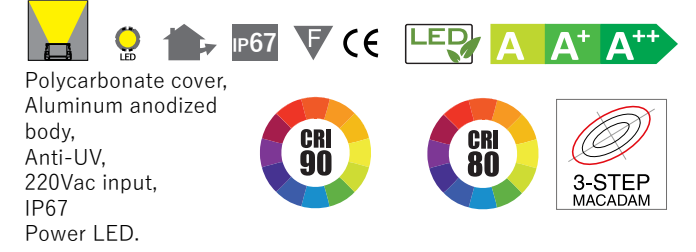

Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		

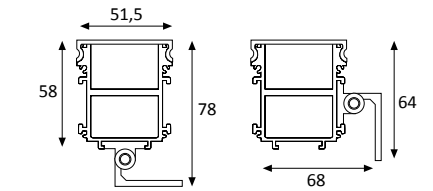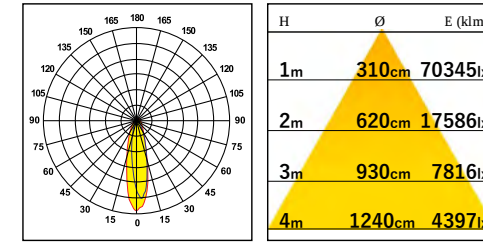

IP65 Connection Socket
Bağlantı Soketi



IP65 Connection Socket
Bağlantı Soketi




RW 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

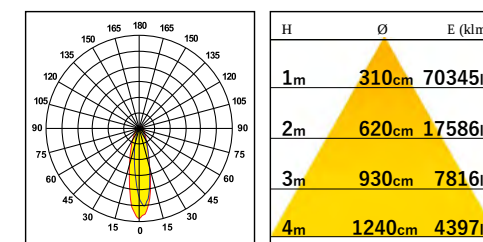

WALLWASHER 04



DIŞ CEPHE LED PROFİL



Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
220Vac input,
IP67
Power LED.



Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



IP65 Connection Socket
Bağlantı Soketi

RWT 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

WALLWASHER 05


DIŞ CEPHE LED PROFİLİ





Polycarbonate cover.
Aluminum anodized
body.
Anti-UV.
Constant current
IP67,
Power LED,
Ø 37mm.



Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		




H	Ø	E (klm)
1m	250cm	1021lx
2m	490cm	255lx
3m	740cm	113lx
4m	980cm	64lx



IP65 Connection Socket
Bağlantı Soketi

RWF 2000

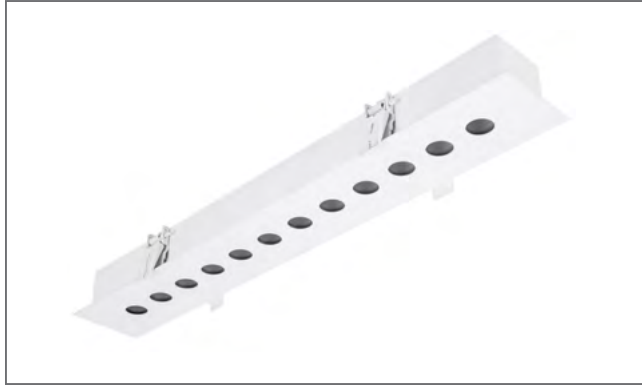

Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

CEILING RECESSED 01


ANKASTRE LED PROFİL




Aluminum anodized body.
IP40,
Power LED,
Constant current,
Hair plaster steel spring case.



Kelvin (K)	Beam Angles	IP
2700K	10°	IP40
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RGB		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



H	Ø	E (klm)
1m	310cm	7034lx
2m	620cm	1758lx
3m	930cm	781lx
4m	1240cm	439lx



RR 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

CEILING RECESSED 02


ANKASTRE LED PROFİL





Polycarbonate cover.
Aluminum anodized body,
IP40,
24Vdc input,
SMD LED,
180 ° light output,
Steel spring.




Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1210cm	35lx



IP40 Connection Socket
Bağlantı Soketi



IP40 Connection Socket
Bağlantı Soketi

RSA 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

CEILING RECESSED 03

ANKASTRE LED PROFİL




Polycarbonate cover.
Aluminum anodized
body,
IP40,
24Vdc input,
Flexible strip LED,
Steel spring,
120° light output.



Kelvin (K) IP

2700K IP40
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER



RSA 1001



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

CEILING RECESSED 04

ANKASTRE LED PROFİL





Polycarbonate cover.
Aluminum anodized
body,
IP40,
220 Vac input,
PCB LED,
Steel spring,
180° light output.



Kelvin (K) IP

2700K IP40
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER



H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1210cm	35lx



IP40 Connection Socket
Bağlantı Soketi




IP40 Connection Socket
Bağlantı Soketi

RDD 1000




Code	LED	W	mA
5113.1.1	1 LED	1W	350

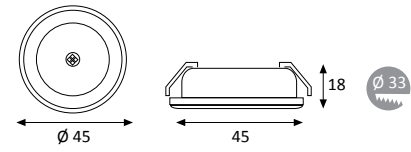

CEILING RECESSED 05

ANKASTRE LED SPOT

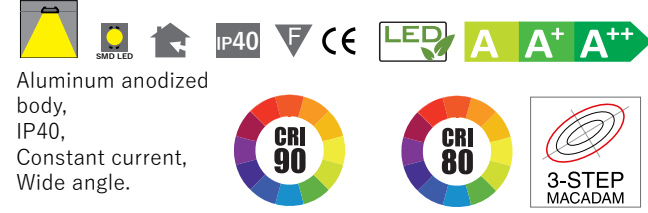


Kelvin (K) IP

2700K IP40
3000K
4000K
5000K
6000K

RDA 1000




Code	LED	W	mA
5114.1.4	1 LED	4W	350-700

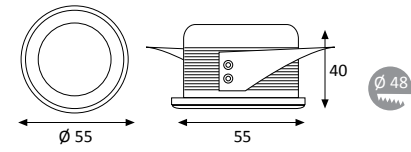

CEILING RECESSED 06

ANKASTRE LED SPOT

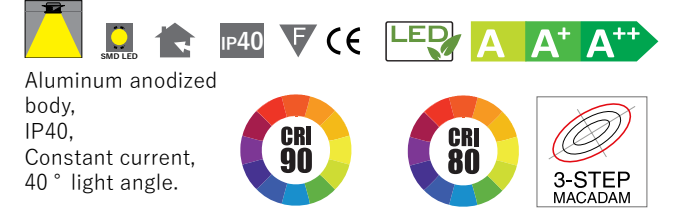

Kelvin (K) IP

2700K IP40
3000K
4000K
5000K
6000K



IP40 Connection Socket
Bağlantı Soketi




IP40 Connection Socket
Bağlantı Soketi

RDZ 1000



Code	LED	W
1310.1.1	1 LED	1W



DRIVE OVER 01

ZEMİN LED



Stainless steel case,
220Vac,
IK08,
16° lens angle.




Kelvin (K) IP

- 2700K IP67
- 3000K
- 4000K
- 5000K
- 6000K
- RED
- GREEN
- BLUE
- AMBER
- CUSTOM

RDZ 1001



Code	LED	W
1311.2.2	2 LED	2W



DRIVE OVER 02

ZEMİN LED




Stainless steel case,
220Vac,
IK08,
16° lens angle.



Kelvin (K) IP


- 2700K IP67
- 3000K
- 4000K
- 5000K
- 6000K
- RED
- GREEN
- BLUE
- AMBER
- CUSTOM



IP65 Junction Box
Buat Kutusu



IP65 Connection Socket
Bağlantı Soketi



IP65 Junction Box
Buat Kutusu



IP65 Connection Socket
Bağlantı Soketi



RSPT-1000

PASLANMAZ ÇELİK KARE SPOT




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP65
SMD LED,
180° light output.







Code	LED	W
5014.1	1 POWER LED	1-5

CRI	LED CHIPS	WATT
80	1 POWER LED	1-5
90	1 POWER LED	1-5

Kelvin (K)	IP	Angle°
2700K	IP65	CUSTOM
3000K		
4000K		
5000K		
6000K		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



H	Ø	E (klm)
1m	300cm	133lx
2m	610cm	33lx
3m	910cm	15lx
4m	1210cm	8

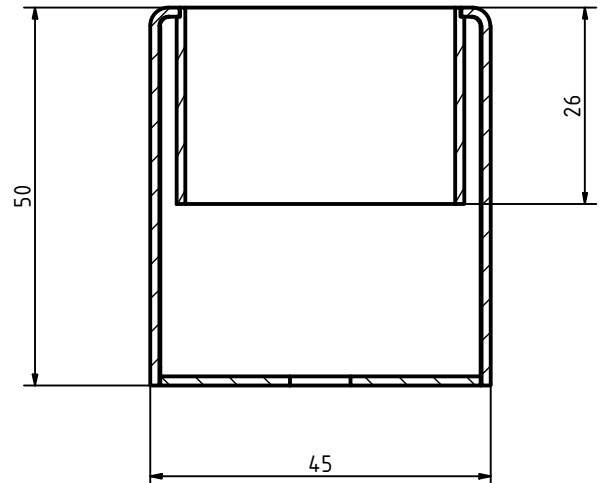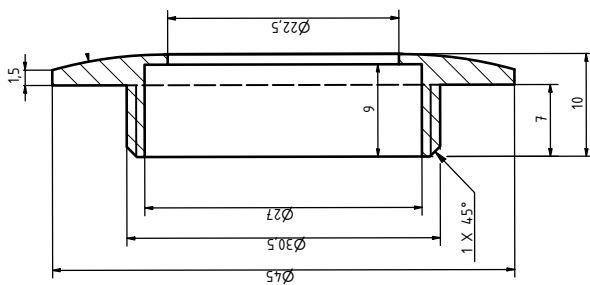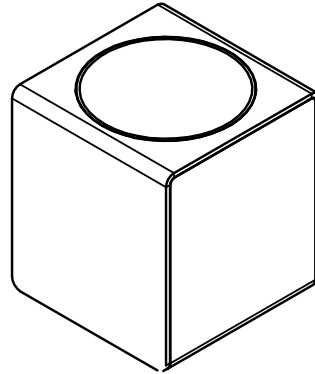



RSPT-2000

PASLANMAZ YERE GÖMME SPOT




Polycarbonate cover,
Aluminum
anodized body,
24Vdc input,
IP65
SMD LED,
180° light output.






Code	LED	W
5014.1	1 POWER LED	1-5

CRI	LED CHIPS	WATT
80	1 POWER LED	1-5
90	1 POWER LED	1-5

Kelvin (K)	IP	Angle°
2700K	IP65	CUSTOM
3000K		
4000K		
5000K		
6000K		
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		



H	Ø	E (klm)
1m	300cm	133lx
2m	610cm	33lx
3m	910cm	15lx
4m	1210cm	8

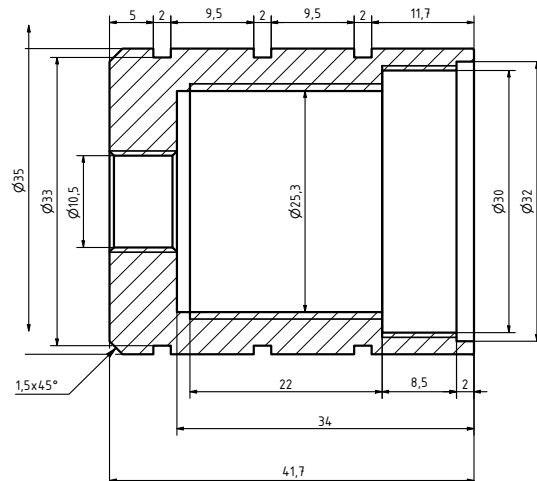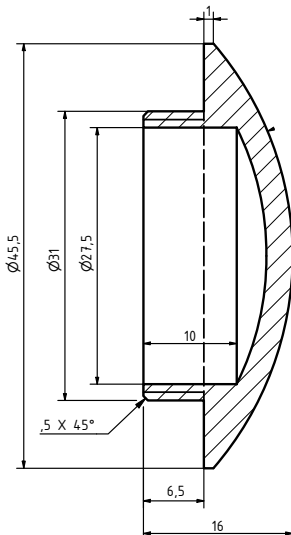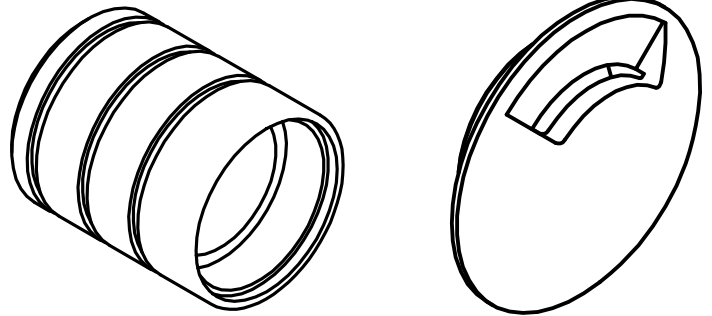

RWF 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

INGROUND 01


ZEMİN LED PROFİL




Tempered glass cover,
Aluminum anodized body,
220Vac input,
IP67,
Power LED,
Constant current,
IK08



Kelvin (K)	Beam Angles	IP
2700K	10°	IP67
3000K	28°	
4000K	46°	
5000K	12° x36°	
6000K	CUSTOM ANGLE	
RED		
GREEN		
BLUE		
AMBER		
CUSTOM		





⚠ Drainage is Neccessary/Drenaj Gereklidir.




IP65 Connection Socket
Bağlantı Soketi

RF 1001

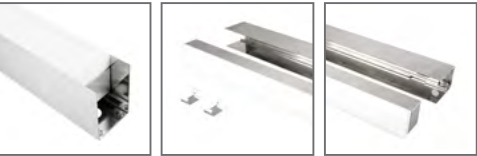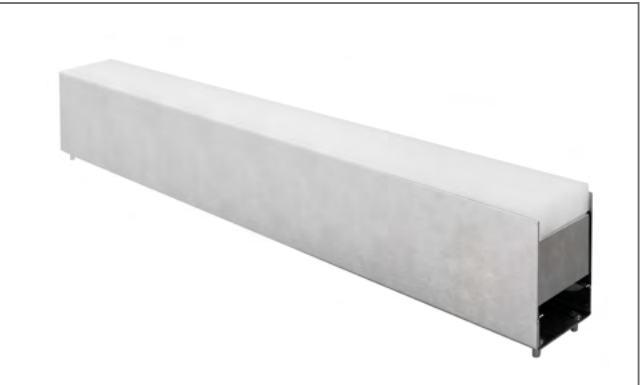

Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

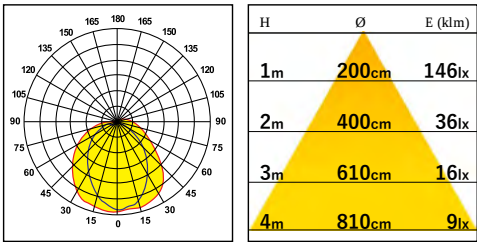

INGROUND 02


ZEMİN LED PROFİL



Acrylic cover,
Aluminum anodized
body,
220Vac input,
IP67,
Flexible strip LED,
IK08



Kelvin (K)	IP
2700K	IP67
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	









IP65 Connection Socket
Bağlantı Soketi

RF 1000

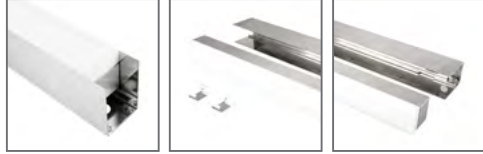

Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

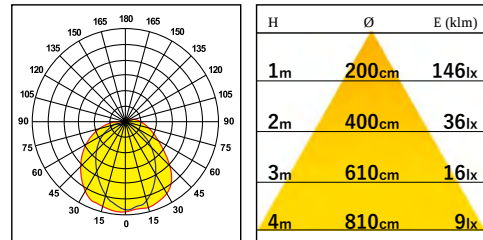

INGROUND 03

ZEMİN LED PROFİLİ




Acrylic cover,
Aluminum
anodized body,
220Vac input,
IP67,
Flexible strip LED,
IK08.



Kelvin (K)	IP
2700K	IP67


3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



RWK 1000



Code	LED	W	Lenght
1410.6.6	6 LED	6 W	270mm



GARDEN LIGHT

ÇİM SPOTU



Polycarbonate cover,
Aluminum anodized
body,
Anti-UV,
24Vdc input,
IP67,
Power LED.



Kelvin (K)	IP
2700K	IP67

3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



IP65 Connection Socket
Bağlantı Soketi



IP65 Junction Box
Bağlantı Kutusu



IP65 Connection Socket
Bağlantı Soketi

RU 2000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 01


ALÜMİNYUM PROFİL SARKIT




Polycarbonate cover,
Aluminum
anodized body,
IP40
24Vdc input,
SMD LED,
270 ° light angle.



Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	320cm	543lx
2m	650cm	136lx
3m	970cm	60lx
4m	1290cm	34lx



Osram OT Dali





LED DIMMER



Osram OT Dali

RU 2001

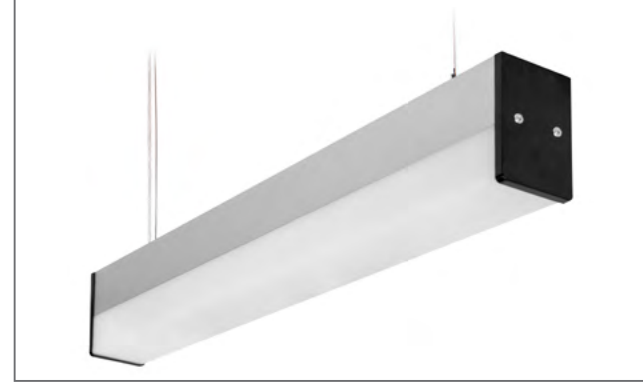

Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 02


ALÜMİNYUM PROFİL SARKIT




Polycarbonate cover,
Aluminum
anodized body,
IP40
24Vdc input,
SMD LED,
270 ° light angle.



Kelvin (K)	IP
2700K	IP40
3000K	
4000K	
5000K	
6000K	
RED	
GREEN	
BLUE	
AMBER	
CUSTOM	



H	Ø	E (klm)
1m	320cm	543lx
2m	650cm	136lx
3m	970cm	60lx
4m	1290cm	34lx



RP 2001



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 03

ALÜMİNYUM PROFİL SARKIT




Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.




Kelvin (K) **IP**

2700K
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



H	Ø	E (klm)
1m	140cm	190lx
2m	280cm	47lx
3m	410cm	21lx
4m	550cm	12lx



RP 2000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 04

ALÜMİNYUM PROFİL SARKIT




Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.




Kelvin (K) **IP**


2700K
3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1210cm	35lx



RV 2000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 05

ALÜMİNYUM PROFİL SARKIT




Polycarbonate cover,
Aluminum anodized
body,
IP40
220Vac input,
SMD LED,
180 ° light angle.




Kelvin (K)	IP
2700K	IP40


3000K
4000K
5000K
6000K
RED
GREEN
BLUE
AMBER
CUSTOM



H	Ø	E (klm)
1m	300cm	560lx
2m	600cm	140lx
3m	910cm	62lx
4m	1210cm	35lx



RP 3000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM

PENDANT 06

ALÜMİNYUM PROFİL SARKIT




Polycarbonate tube body,
Aluminum anodized
inner body,
IP40,
24Vdc input,
SMD LED,
180 ° light angle.




Kelvin (K)	IP
2700K	IP40

3000K
4000K
5000K
6000K



H	Ø	E (klm)
1m	140cm	190lx
2m	280cm	47lx
3m	410cm	21lx
4m	550cm	12lx




RD DK 1000



Code	Bulb	W	Kelvin (K)	IP
216.6	E-27	6W	2700K	IP40
216.8	E-27	8W	3000K	
216.10	E-27	10W	5000K	
216.15	E-27	15W		

PENDANT

ALÜMİNYUM PROFİL SARKIT



RD SC 1000



Code	LED	W	Min.Cutting
5218.60.15	60 LED	15W/m	24Vdc
5218.120.12	120 LED	12W/m	24Vdc
Ø60 - Ø 90 - Ø120			


PENDANT xx

ALÜMİNYUM PROFİL SARKIT



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	

RD 6 1000



Code	LED	W	Min.Cutting
5014.72	72 LED	CUSTOM	83mm
5014.120	120 LED	CUSTOM	83mm
5014.168	168 LED	CUSTOM	83mm

CRI	LED CHIPS	WATT
80	2835 LED	CUSTOM
90	2835 LED	CUSTOM


PENDANT

ALÜMİNYUM PROFİL SARKIT



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	

RD DV 1000



Code	LED	W	Min.Cutting
5219.60.15	60 LED	15W/m	24Vdc
5219.120.12	120 LED	12W/m	24Vdc
Ø60 - Ø 90 - Ø120			



Kelvin (K)	IP
2700K	IP40
3000K	
5000K	