


PRODUCT DATA SHEET



FLEXIBLE LED LIGHTING RL-1010 SERIES

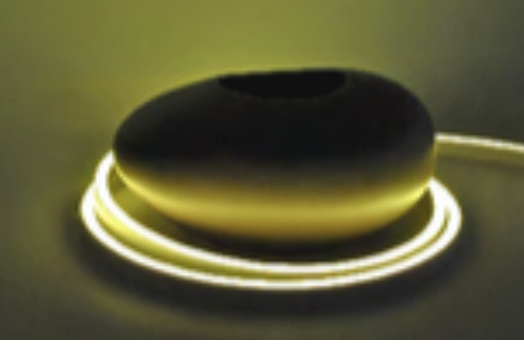

LUMINAIRE DETAILS

SMD LED light source,
max bending diameter
of 12 cm, Fire
retardant, anti UV, 160°
beam angle, Side View,
IP68 protection
24 VDC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K
RED/GREEN/BLUE
AMBER
RGB

MOUNTING

Surface Mounted

APPLICATIONS

Outdoors

CONTROL SYSTEM

1-10V
DMX
DALI
ON/OFF

OPTIONAL ACCESSORIES

Power supply



3000K



4000K




5000K



IP67



CE

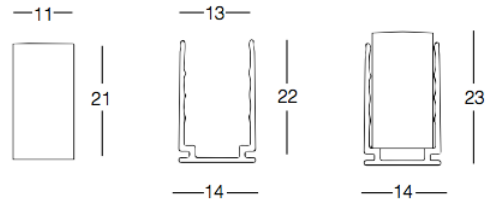

RL 1010 SERIES					
ORDER CODE	LED/MT	COLOR TEMPERATURE	LUMEN/MT	POWER CONSUMPTION	IP RATE
RL-1010.01	60 LED/MT	BEYAZ	320 LM/MT	12 W/MT	IP 68
RL-1010.02	60 LED/MT	KIRMIZI	100 LM/MT	7,2 W/MT	IP 68
RL-1010.03	60 LED/MT	AMBER	75 LM/MT	7,2 W/MT	IP 68
RL-1710.01	60 LED/MT	RGB	RGB	12 W/MT	IP 68