

PRODUCT DATA SHEET



LİNEER LED RP-2000 SERIES



LUMINARE DETAILS

HOUSING

PMMA cover
Aluminium eloxal body

VOLTAGE

230 VAC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K

COVER TYPE

Opal MO

MOUNTING

PENDANT

CONTROL SYSTEM

1-10V
DALI
ON/OFF

APPLICATIONS

Indoors

OPTIONAL ACCESSORIES

Emergency Kit



3000K



4000K



5000K


IP40



RoHS



CE

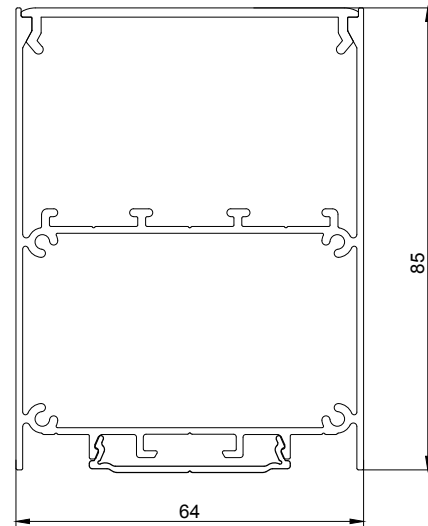

RP 2000 SERIES						
ORDER CODE	LED/MT	LED	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	IP RATE
RP-2000	72 LED/MT	5630	2500 LM/MT	30 W/MT	2700 3000 4000 5000	IP 40