



# PRODUCT DATA SHEET



## FLEXIBLE LED LIGHTING RS-1000 SERIES

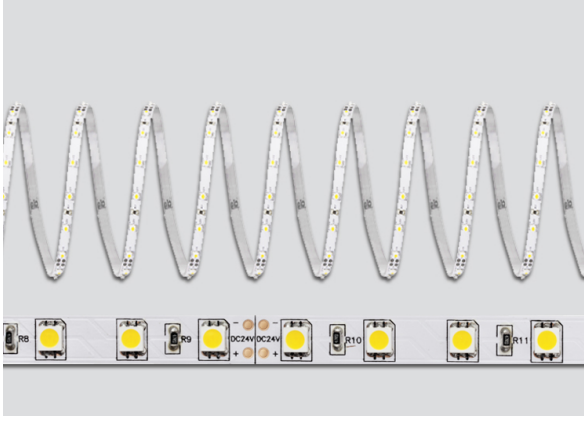

### LUMINARE DETAILS

VOLTAGE  
24 VDC

CUT  
Every 10 cm

### COLOR TEMPERATURE

2700 K  
3000 K  
4000 K  
5000 K  
AMBER  
RGB  
RGBW

### MOUNTING

Surface Mounted

### CONTROL SYSTEM

1-10V  
DMX  
DALI  
ON/OFF

### APPLICATIONS

Indoors  
Outdoors

### IP RATE

IP 20  
IP 67

### OPTIONAL ACCESSORIES

Power supply



3000K



4000K



5000K



RGB



IP20



IP67



III



F

RoHS

CE

RS-1000 SERIES					
ORDER CODE	LED/MT	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	IP RATE
RS-1000.01	60 LED/MT	360 LM/MT	5 W/MT	2700	IP 20
				3000	IP 20
				4000	IP 20
				5000	IP 20
RS-1000.02	60 LED/MT	1140 LM/MT	15 W/MT	2700	IP 20
				3000	IP 20
				4000	IP 20
				5000	IP 20
RS-1000.03	60 LED/MT	AMBER	15 W/MT	AMBER (A)	IP 20
	60 LED/MT	RGB	15 W/MT	RGB (R)	IP 20
	60 + 60 LED/MT	RGBW	15 + 5 W/MT	RGBW (RW)	IP 20
RS-1000.04	60 LED/MT	360 LM/MT	5 W/MT	2700	IP 67
				3000	IP 67
				4000	IP 67
				5000	IP 67
RS-1000.05	60 LED/MT	1140 LM/MT	15 W/MT	2700	IP 67
				3000	IP 67
				4000	IP 67
				5000	IP 67
RS-1000.06	60 LED/MT	AMBER	15 W/MT	AMBER (A)	IP 67
	60 LED/MT	RGB	15 W/MT	RGB (R)	IP 67
	60 + 60 LED/MT	RGBW	15 + 5 W/MT	RGBW (RW)	IP 67