



PRODUCT DATA SHEET



LİNEER LED RU-2000 SERIES



LUMINARE DETAILS

HOUSING

U PMMA cover
Aluminium eloxal body

VOLTAGE

24 VDC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K
RGB

COVER TYPE

Opal MO

MOUNTING

Surface montage

APPLICATIONS

Indoors
Outdoors

CONTROL SYSTEM

1-10V
DMX
DALI
ON/OFF

OPTIONAL ACCESSORIES

Power Supply



3000K



4000K



5000K



RGB

IP40


IP65

III

F

RoHS

CE

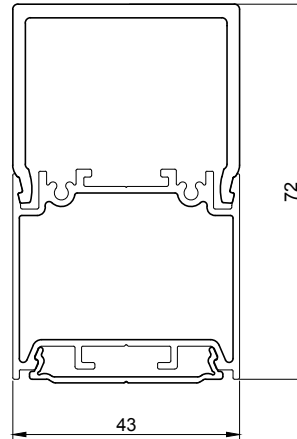



RU 2000 SERIES						
ORDER CODE	48	LED	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	IP RATE
RU-2000.01	36 LED/MT	5630	1600 LM/MT	20 W/MT	2700	IP 40, IP 65
RU-2000.02	60 LED/MT	5630	2000 LM/MT	24 W/MT	2700	IP 40, IP 65
RU-2000.03	72 LED/MT	5630	2400 LM/MT	30 W/MT	2700	IP 40, IP 65
RU-2000.01	48 LED/MT	5630	1600 LM/MT	20 W/MT	3000	IP 40, IP 65
RU-2000.02	60 LED/MT	5630	2000 LM/MT	24 W/MT	3000	IP 40, IP 65
RU-2000.03	72 LED/MT	5630	2400 LM/MT	30 W/MT	3000	IP 40, IP 65
RU-2000.01	48 LED/MT	5630	1600 LM/MT	20 W/MT	4000	IP 40, IP 65
RU-2000.02	60 LED/MT	5630	2000 LM/MT	24 W/MT	4000	IP 40, IP 65
RU-2000.03	72 LED/MT	5630	2400 LM/MT	30 W/MT	4000	IP 40, IP 65
RU-2000.01	48 LED/MT	5630	1600 LM/MT	20 W/MT	5000	IP 40, IP 65
RU-2000.02	60 LED/MT	5630	2000 LM/MT	24 W/MT	5000	IP 40, IP 65
RU-2000.03	72 LED/MT	5630	2400 LM/MT	30 W/MT	5000	IP 40, IP 65
RU-2700.01	72 LED/MT	5050	RGB		RGB	IP 40, IP 65