



PRODUCT DATA SHEET



LİNEER LED RV-1000 SERIES



LUMINARE DETAILS

HOUSING
U PMMA cover
Aluminium eloxal body

VOLTAGE
230 VAC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K

COVER TYPE

Opal MO

MOUNTING

Surface Mounted

APPLICATIONS

Indoors

CONTROL SYSTEM

1-10V
DALI
ON/OFF

OPTIONAL ACCESSORIES

Emergency Kit



3000K



4000K




5000K

IP40



RoHS

CE

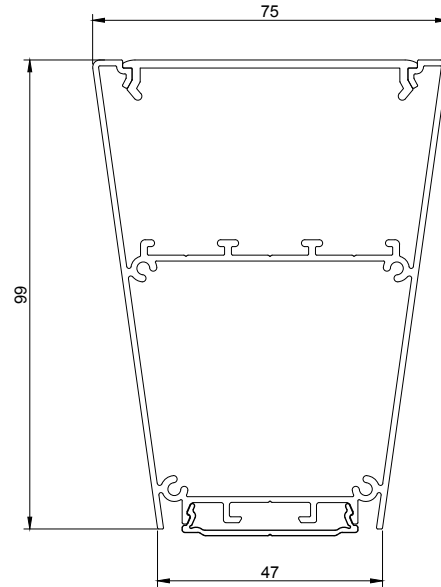

RV-1000 SERIES						
ORDER CODE	LED/MT	LED	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	IP RATE
RV-1000	72 LED/MT	5630	2500 LM/MT	30 W/MT	2700	IP 40
					3000	IP 40
					4000	IP 40
					5000	IP 40