


# PRODUCT DATA SHEET



## LİNEER LED RV-2000 SERIES



### LUMINARE DETAILS

HOUSING  
U PMMA cover  
Aluminium eloxal body

VOLTAGE  
230 VAC

### COLOR TEMPERATURE

2700 K  
3000 K  
4000 K  
5000 K

### COVER TYPE

Opal MO

### MOUNTING

Pendant

### APPLICATIONS

Indoors

### CONTROL SYSTEM

1-10V  
DALI  
ON/OFF

### OPTIONAL ACCESSORIES

Emergency Kit



3000K



4000K




5000K



RoHS

CE

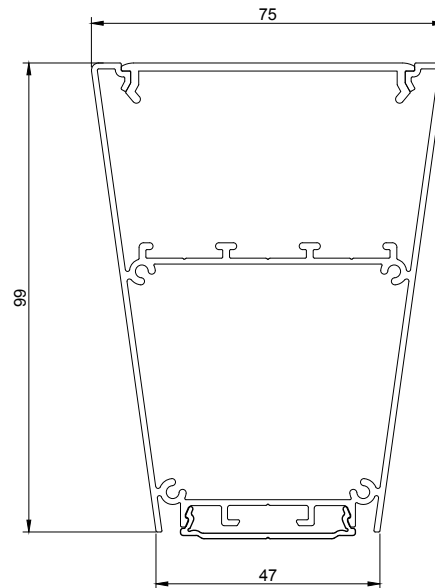

RV-2000 SERIES						
ORDER CODE	LED/MT	LED	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	IP RATE
RV-2000	72 LED/MT	5630	2500 LM/MT	30 W/MT	2700	IP 40
					3000	IP 40
					4000	IP 40
					5000	IP 40