

PRODUCT DATA SHEET



LİNEER LED RW-1000 SERIES



LUMINARE DETAILS

HOUSING

U PMMA cover
Aluminium eloxal body

VOLTAGE

230 VAC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K

MOUNTING

Surface Mounted

CONTROL SYSTEM

1-10V
DALI
ON/OFF

APPLICATIONS

Outdoors



3000K



4000K



5000K




RoHS



CE

BEAM ANGLE

10° | 22° x 116°
25° | 14° x 34°
46°

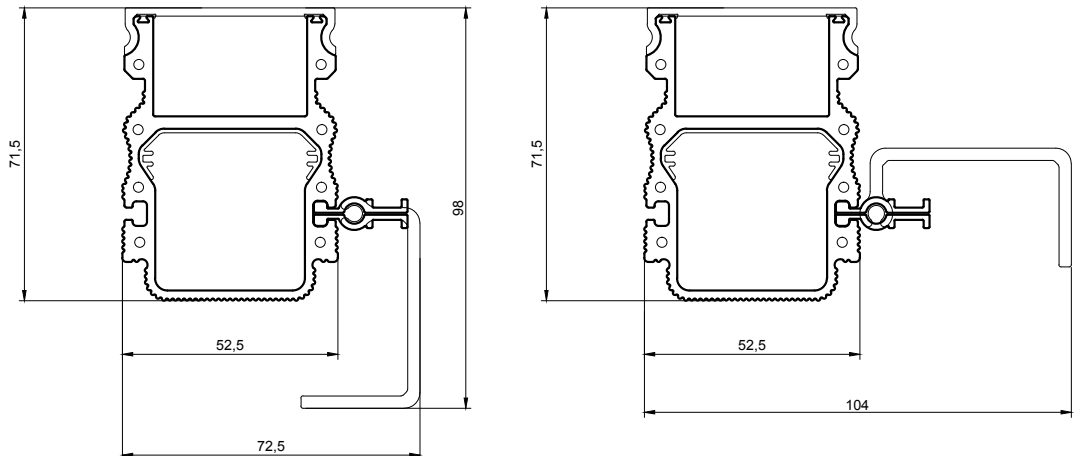

RW 1000						
PRODUCT CODE	LED/MT	LUMEN/MT	POWER CONSUMPTION	COLOR TEMPERATURE	LENGHT (mm)	IP RATE
RW-1000.27	6 LED/MT	750 LM/MT	6 W/MT	2700	270	IP 67
		960 LM/MT	12 W/MT	3000		IP 67
		1290 LM/MT	18 W/MT	4000		IP 67
				5000		IP 67
RW-1000.50	12 LED/MT	1500 LM/MT	12 W/MT	2700	500	IP 67
		1920 LM/MT	24 W/MT	3000		IP 67
		2580 LM/MT	36 W/MT	4000		IP 67
				5000		IP 67
RW-1000.73	18 LED/MT	2250 LM/MT	18 W/MT	2700	730	IP 67
		2880 LM/MT	36 W/MT	3000		IP 67
		3870 LM/MT	54 W/MT	4000		IP 67
				5000		IP 67
RW-1000.97	24 LED/MT	3000 LM/MT	24 W/MT	2700	970	IP 67
		3840 LM/MT	48 W/MT	3000		IP 67
		5160 LM/MT	72 W/MT	4000		IP 67
				5000		IP 67